



Delivery includes inlet and outlet flanges NPT 1 1/4".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		\dot{V} max.	Δp_t max.	\dot{V} max.	Δp_t max.	Rated output	Voltage	Current	RPM		
		SCFM	in. H ₂ O	SCFM	in. H ₂ O						
Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	µF/V	lb	
SD 2n VFD 2-H	60	54	84	54	72	0,88	265/460	2,7/1,57	3430	-	33

Pressure

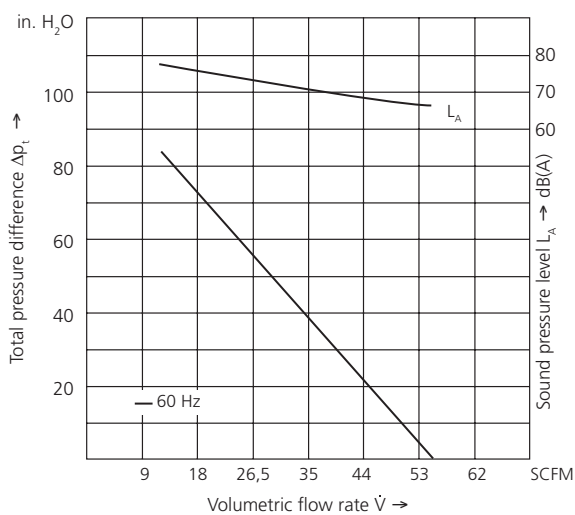

Vacuum

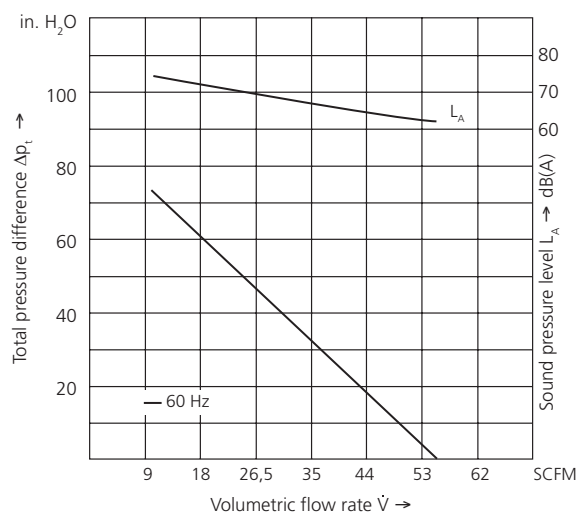

Elektor
airsystems gmbh

Hellmuth-Hirth-Str. 2
D-73760 Ostfildern
Germany
sales@elektor.com
www.elektor.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielctric.com
www.americas.fujielctric.com