



Delivery includes inlet and outlet flanges NPT 1 1/4".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		$\dot{V}$ max.	$\Delta p_t$ max.	$\dot{V}$ max.	$\Delta p_t$ max.	Rated output	Voltage	Current	RPM		
		SCFM	in. H <sub>2</sub> O	SCFM	in. H <sub>2</sub> O						
Hz	SCFM	in. H <sub>2</sub> O	SCFM	in. H <sub>2</sub> O	hp	V	A	min <sup>-1</sup>	µF/V	lb	
SD 2n VFD 2-L	60	54	84	54	72	0,88	230/400	3,10/1,80	3430	-	33

## Pressure

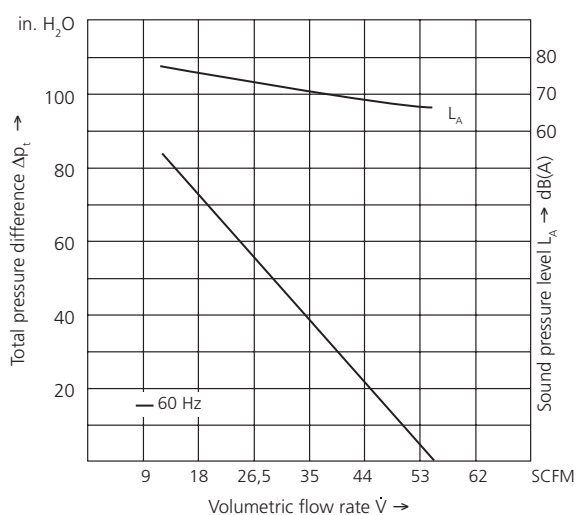

## Vacuum

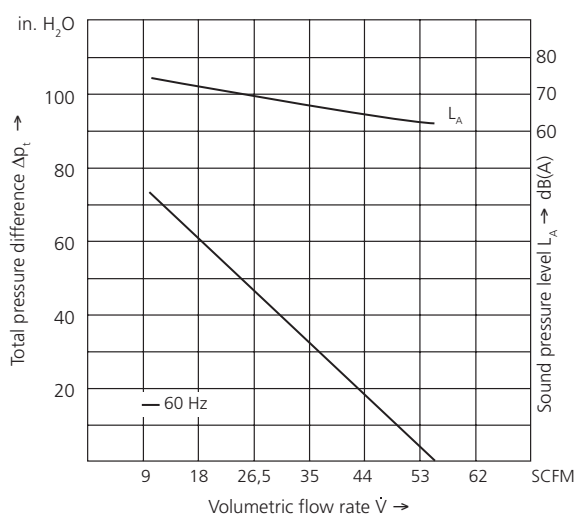

**Elektror**  
airsystems gmbh

Hellmuth-Hirth-Str.2  
D-73760 Ostfildern  
Germany  
sales@elektror.com  
www.elektror.com

**FE**  
Fuji Electric

Fuji Electric Corp. of America  
47520 Westinghouse Drive  
Fremont, CA 94539  
USA  
x-fea-rc-group@fujielectric.com  
www.americas.fujielectric.com