


Delivery includes inlet and outlet flanges NPT 1 1/4".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		V max.	Δp_t max.	V max.	Δp_t max.	Rated output	Voltage	Current	RPM	230 V	
	Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	μ F/V	lb
SE 2n VFD 2S	60	54	84	54	72	1,0	115	9,0	3360	60/450	33

Pressure

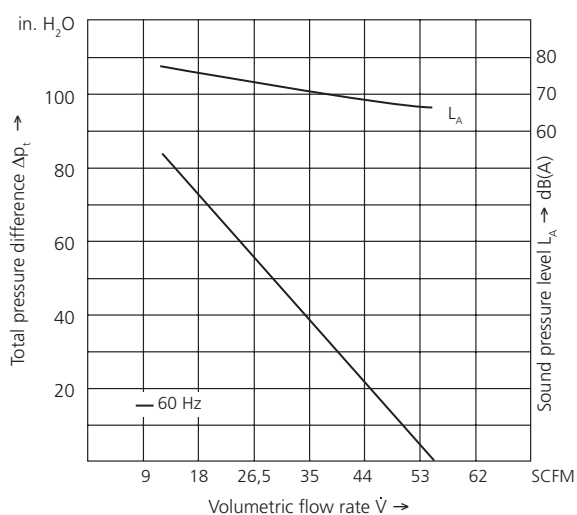

Vacuum

