


Dimensions in mm - subject to modifications.

Delivery includes inlet and outlet flanges NPT 3/4".

| Type | Frequency | Maximum performance when used as blower | | Maximum performance when used as extractor | | Motor ratings | | | | Capacitor | Weight (approx.) |
|-----------------|-----------|---|----------------------|--|----------------------|---------------|---------|-------------------|------|-----------|------------------|
| | | \dot{V} max. | Δp_t max. | \dot{V} max. | Δp_t max. | Rated output | Voltage | Current | RPM | | |
| | | SCFM | in. H ₂ O | SCFM | in. H ₂ O | | | | | | |
| Hz | SCFM | in. H ₂ O | SCFM | in. H ₂ O | hp | V | A | min ⁻¹ | μF/V | lb | |
| SD 3 VFD 3-H | 60 | 26 | 140 | 26 | 104 | 0,75 | 265/460 | 2,9/1,67 | 3520 | - | 38 |

Pressure

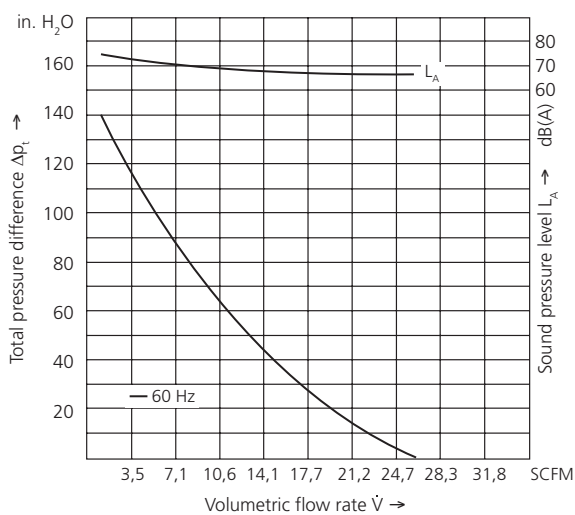

Vacuum

