
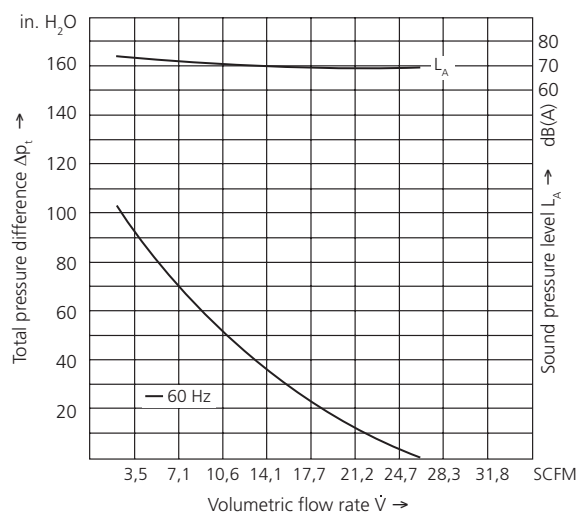


Delivery includes inlet and outlet flanges NPT 3/4".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		\dot{V} max.	Δp_t max.	\dot{V} max.	Δp_t max.	Rated output	Voltage	Current	RPM		
		Hz	SCFM	in. H ₂ O	SCFM						
SD 3 VFD 3-L	60	26	140	26	104	0,75	230/400	3,35/1,92	3520	-	38

Pressure

Vacuum

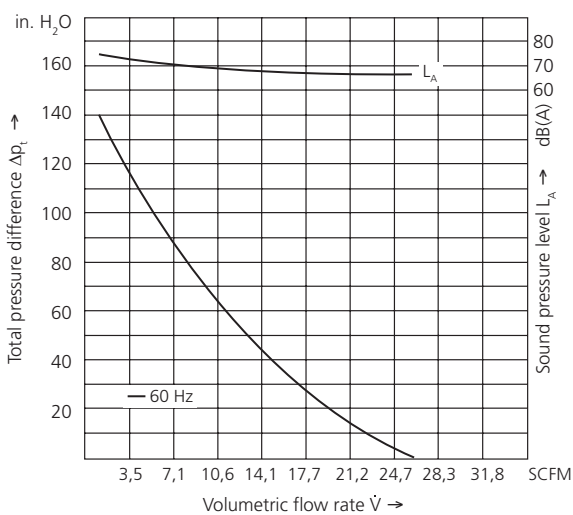

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektor.com
www.elektor.com



Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielectric.com
www.americas.fujielectric.com