


Delivery includes inlet and outlet flanges NPT 3/4".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		\dot{V} max.	Δp_t max.	\dot{V} max.	Δp_t max.	Rated output	Voltage	Current	RPM	230 V	
	Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	μ F/V	lb
SE 3 VFD 3S	60	26	140	26	104	0,75	115	8,0	3430	60/450	38

Pressure

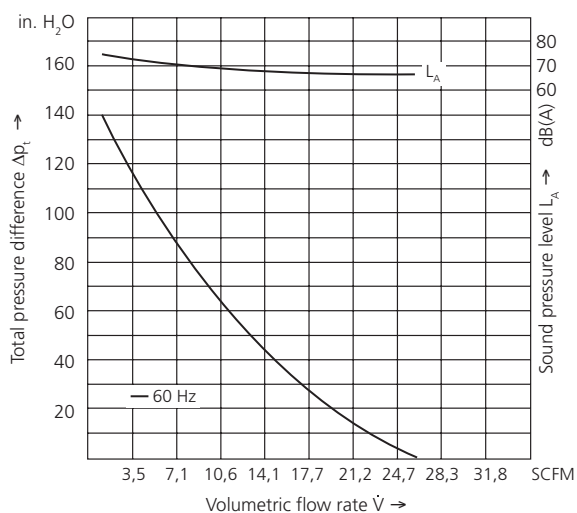

Vacuum

