


Dimensions in mm - subject to modifications.

Delivery includes inlet and outlet flanges NPT 1½".

Type	Efficiency class	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			V max. SCFM	Δp_t max. in. H ₂ O	V max. SCFM	Δp_t max. in. H ₂ O	Rated output hp	Voltage V	Current A	RPM min ⁻¹	
SD 4n VFD 41-H	NEMA Energy Efficient	60	120	72	120	76	1,8	265/460	3,9/2,25	3400	48

Pressure

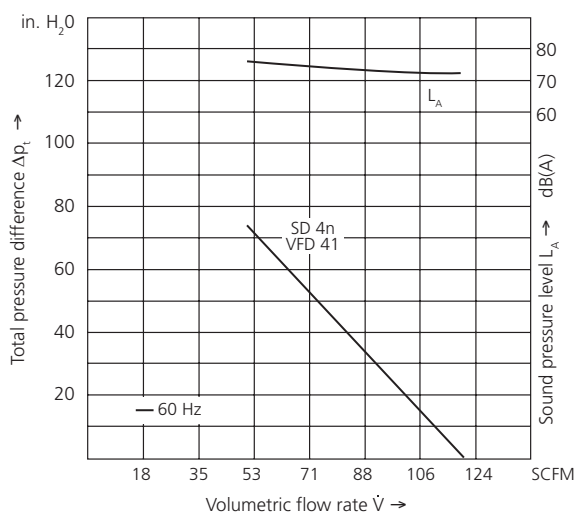

Vacuum

