
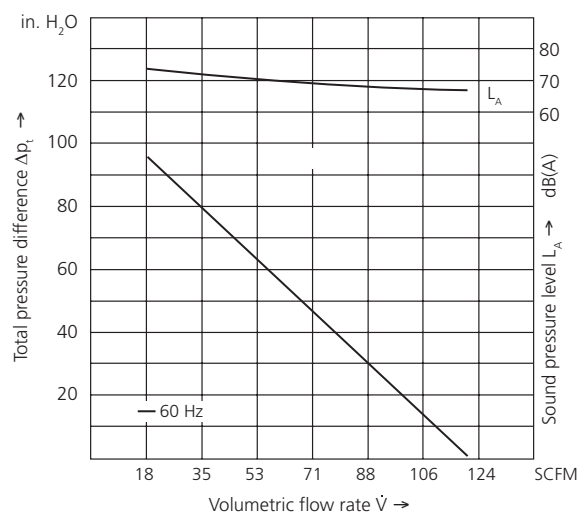


Delivery includes inlet and outlet flanges NPT 1½".

Type	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Capacitor	Weight (approx.)
		$\dot{V}$ max.	$\Delta p_t$ max.	$\dot{V}$ max.	$\Delta p_t$ max.	Rated output	Voltage	Current	RPM	230 V	
	Hz	SCFM	in. H <sub>2</sub> O	SCFM	in. H <sub>2</sub> O	hp	V	A	min <sup>-1</sup>	μF/V	lb
SE 4n VFD 41S	60	120	96	120	96	2,0	230	10,0	3300	40/450	46

**Pressure**

**Vacuum**

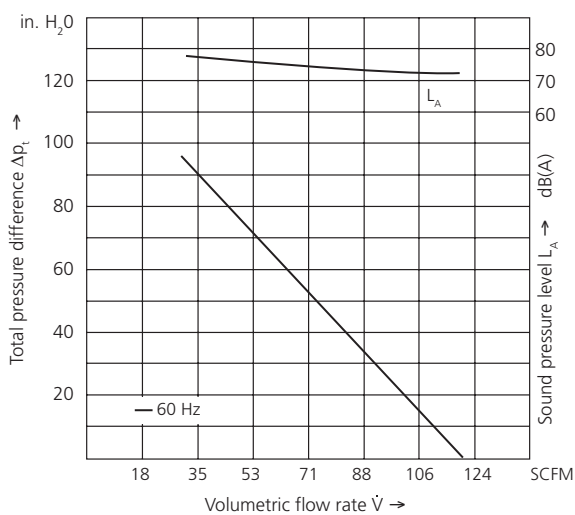

Hellmuth-Hirth-Str.2  
D-73760 Ostfildern  
Germany  
sales@elektror.com  
www.elektror.com



Fuji Electric Corp. of America  
47520 Westinghouse Drive  
Fremont, CA 94539  
USA  
x-fea-rc-group@fujielctric.com  
www.americas.fujielctric.com