



Delivery includes inlet and outlet flanges NPT 1½".

Type	Efficiency class	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.)
			V max.	Δp_t max.	V max.	Δp_t max.	Rated output	Voltage	Current	RPM	
		Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	lb
SD 42 VFD 42-L	NEMA Energy Efficient	60	120	100	120	104	2,4	230/400	6,30/3,65	3450	51

Pressure

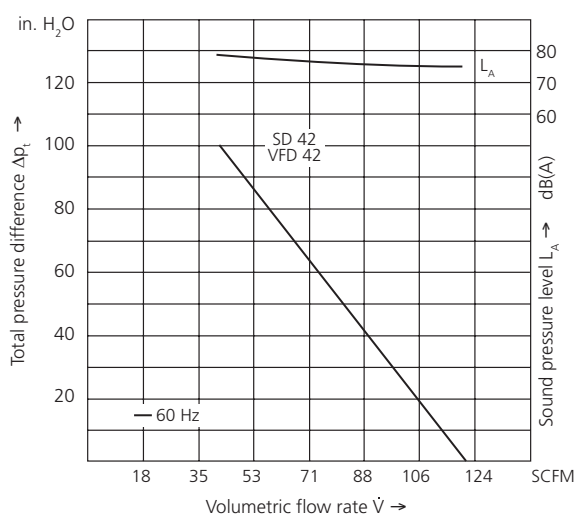

Vacuum

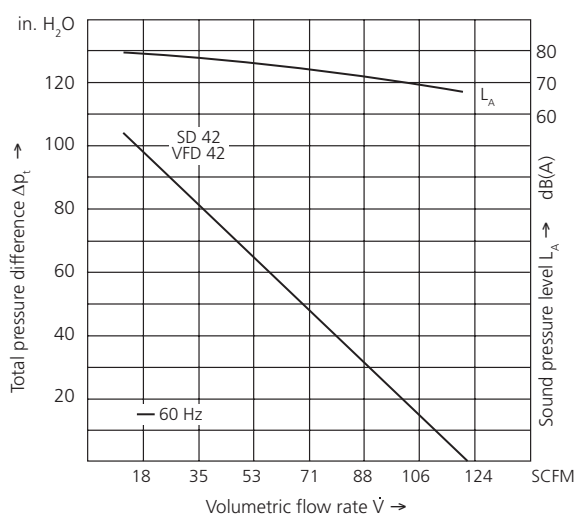

Elektrotor
airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektrotor.com
www.elektrotor.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielectric.com
www.americas.fujielectric.com