


Delivery includes inlet and outlet flanges NPT 2".

Type	Efficiency class	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			V max. SCFM	Δp_t max. in. H ₂ O	V max. SCFM	Δp_t max. in. H ₂ O	Rated output hp	Voltage V	Current A	RPM min ⁻¹	
SD 5400 VFD 5D-H	NEMA Energy Efficient	60	148	209	148	157	6,4	265/460	13,8/8,0	3525	133

Pressure

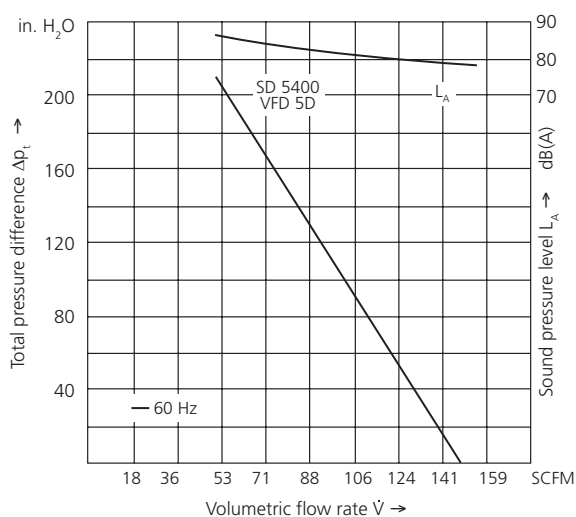

Vacuum

