
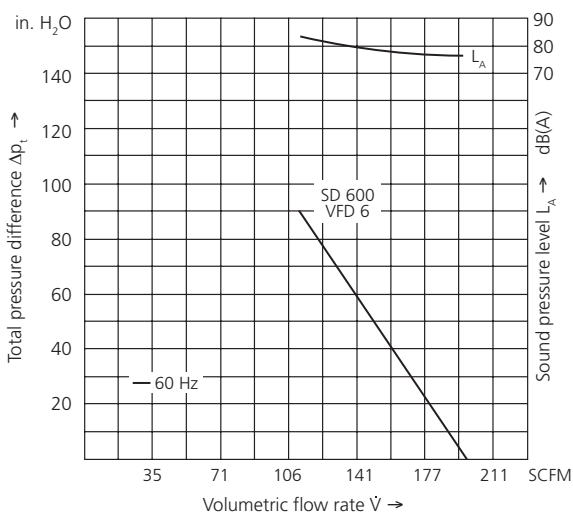



Delivery includes inlet and outlet flanges NPT 2".

Type	Efficiency class 	Frequency Hz	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			\dot{V} max. SCFM	Δp_t max. in. H ₂ O	\dot{V} max. SCFM	Δp_t max. in. H ₂ O	Rated output hp	Voltage V	Current A	RPM min ⁻¹	
SD 600 VFD 6-H	NEMA Energy Efficient	60	198	90	198	85	3,6	265/460	8,0/4,65	3480	77

Pressure



Vacuum

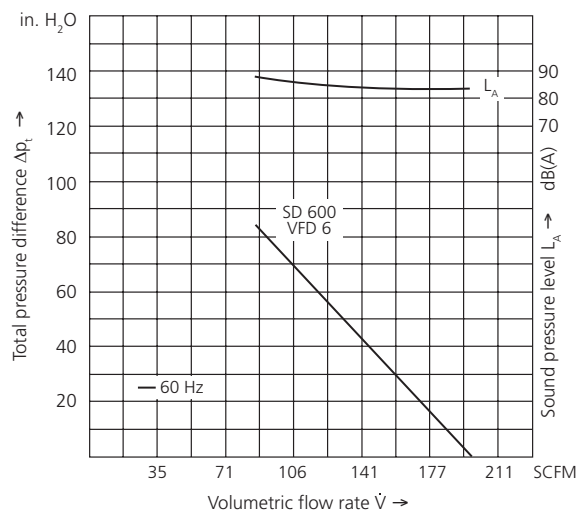

Elektrotor
airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektrotor.com
www.elektrotor.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielectric.com
www.americas.fujielectric.com