
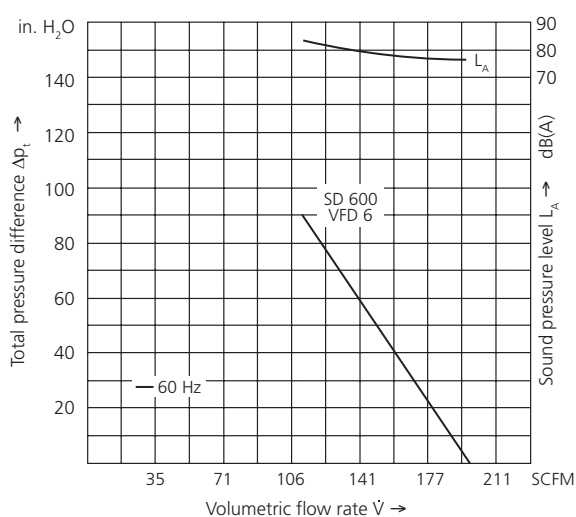


Delivery includes inlet and outlet flanges NPT 2".

Type	Efficiency class 	Frequency Hz	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			\dot{V} max. SCFM	Δp_t max. in. H ₂ O	\dot{V} max. SCFM	Δp_t max. in. H ₂ O	Rated output hp	Voltage V	Current A	RPM min ⁻¹	
SD 600 VFD 6-L	NEMA Energy Efficient	60	198	90	198	85	3,6	230/400	9,20/5,30	3480	77

Pressure



Vacuum

