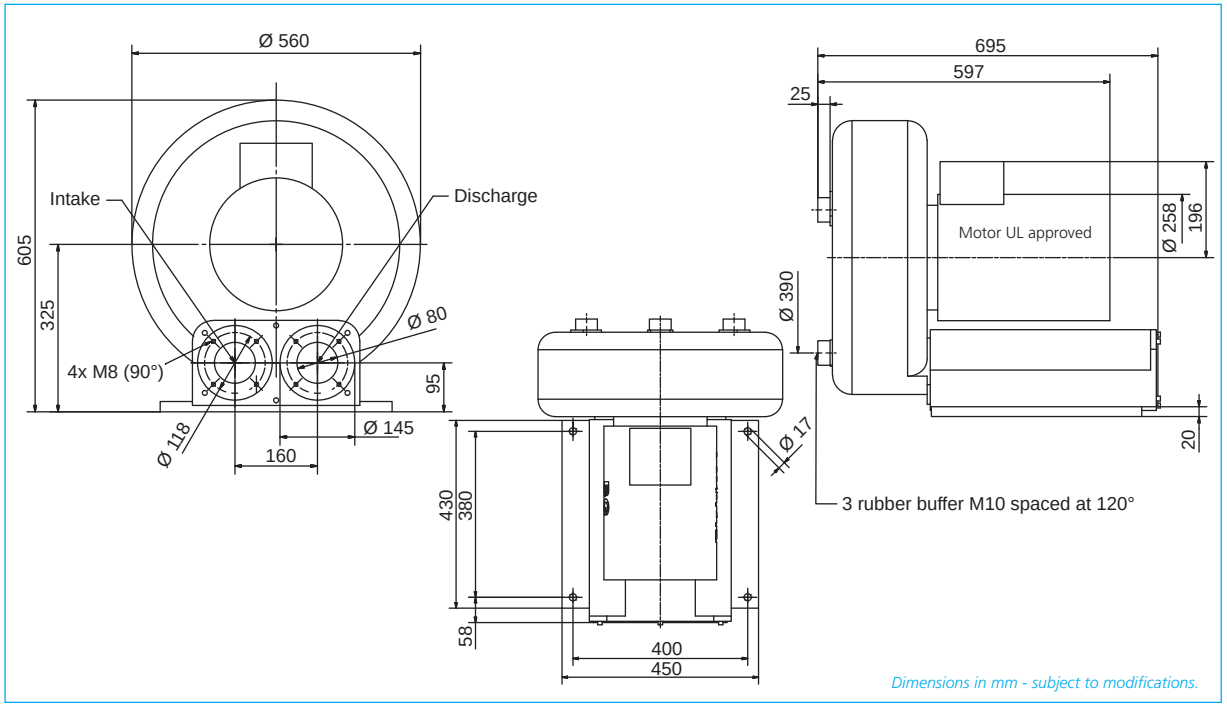

Delivery includes inlet and outlet flanges NPT 3".

Type	Efficiency class	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.)
			$\dot{V}$ max.	Δp_t max.	$\dot{V}$ max.	Δp_t max.	Rated output	Voltage	Current	RPM	
		Hz	SCFM	in. H_2O	SCFM	in. H_2O	hp	V	A	min^{-1}	lb
SD 900 **VFD 9**	NEMA Energy Efficient	60	618	137	618	129	17,7	460 Δ	21,5	3525	256

Pressure

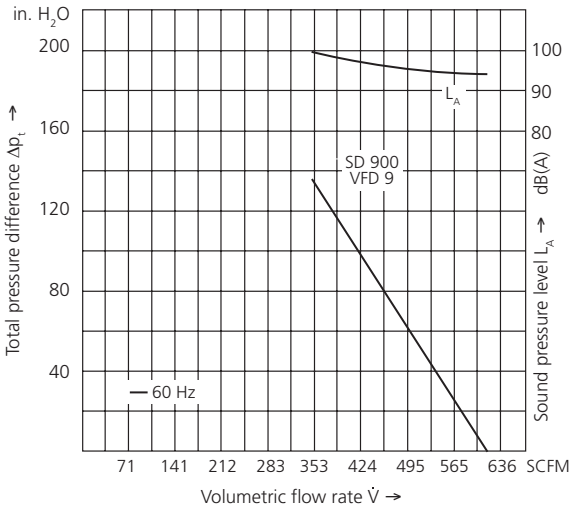

Vacuum

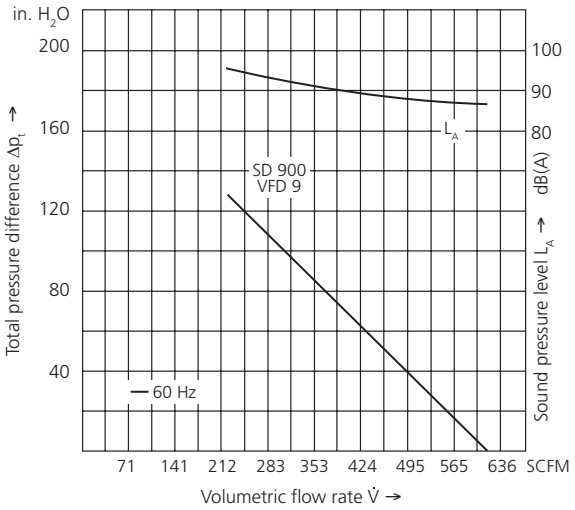

Elektror airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektror.com
www.elektror.com

Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielectric.com
www.americas.fujielectric.com

01.13/04 - Technical and constructional subject to change.

Elektror