

1MBI800UG-330

IGBT Modules

IGBT MODULE (U series) 3300V / 800A / 1 in one package

■ Features

- AlSiC Baseplate
- AlN DCB substrate
- CTI ≥ 600
- V_{iso} 6000 Vac
- Low Inductance module structure

■ Applications

- Traction drives
- Industrial motor drives
- Wind power
- Chopper



■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)

Items	Symbols	Conditions	Maximum ratings	Units
Collector-Emitter voltage	V_{CES}		3300	V
Gate-Emitter voltage	V_{GES}		± 20	V
Collector current	I_c	Continuous	$T_c=25^\circ\text{C}$ $T_c=80^\circ\text{C}$	A
			1330 800	
	$I_{c\text{ pulse}}$	1ms	$T_c=25^\circ\text{C}$ $T_c=80^\circ\text{C}$	
			2660 1600	
	$-I_c$		800	
	$-I_{c\text{ pulse}}$	1ms	1600	
Collector power dissipation	P_c	1 device	9.6	kW
Junction temperature	T_j		150	$^\circ\text{C}$
Storage temperature	T_{stg}		$-40 \sim +125$	$^\circ\text{C}$
Isolation voltage	Between terminal and copper base (*1) V_{iso}	AC : 1min.	6.0	kVAC
Partial discharge extinction voltage	V_e	AC, $Q \leq 10\text{pC}$ (acc. To IEC 1287)	2.6	kVAC
Screw torque	Mounting (*2)		5.75	N·m
	Main Terminals (*2)		10	
	Sense Terminals (*2)		2.5	

Note *1: All terminals should be connected together when isolation test will be done.

Note *2: Recommendable value : Mounting : 4.25-5.75 N·m (M6), Main Terminal : 8-10 N·m (M8), Sense Terminal : 1.7-2.5 N·m (M4)

● Electrical characteristics (at T_j = 25°C unless otherwise specified)

Items	Symbols	Conditions		Characteristics			Units
				min.	typ.	max.	
Zero gate voltage collector current	I _{CES}	V _{GE} = 0V, V _{CE} = 3300V		-	-	1.0	mA
Gate-Emitter leakage current	I _{GES}	V _{CE} = 0V, V _{GE} = ±20V		-	-	3200	nA
Gate-Emitter threshold voltage	V _{GE (th)}	V _{CE} = 20V, I _C = 800mA		6.0	6.75	7.5	V
Collector-Emitter saturation voltage	V _{CE (sat)} (main terminal)	V _{GE} = 15V	T _J =25°C	-	2.43	2.66	V
	T _J =125°C		-	3.15	3.45		
	V _{CE (sat)} (chip)	I _C = 800A	T _J =25°C	-	2.28	2.51	
	T _J =125°C		-	3.00	3.30		
Input capacitance	C _{ies}	V _{GE} = 0V, V _{CE} = 10V, f = 1MHz		-	160	-	nF
Turn-on time	t _{on}	V _{CC} = 1800V, I _C = 800A V _{GE} = ±15V, T _J = 125°C		-	3.40	-	μs
	t _r			-	2.30	-	
Turn-off time	t _{off}	R _g = 2.4Ω		-	2.40	-	
	t _f			-	0.40	-	
Forward on voltage	V _F (main terminal)	V _{GE} = 0V	T _J =25°C	-	2.73	2.96	V
	T _J =125°C		-	2.95	3.25		
	V _F (chip)	I _F = 800A	T _J =25°C	-	2.58	2.81	
	T _J =125°C		-	2.80	3.10		
Reverse recovery time	t _{rr}	I _F = 800A		-	0.85	-	μs
Lead resistance, terminal-chip	R lead			-	0.188	-	mΩ

● Thermal resistance characteristics


Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Thermal resistance (1device)	R _{th(j-c)}	IGBT	-	-	13.0	°C/kW
		FWD	-	-	25.0	
Contact thermal resistance (1device)	R _{th(c-f)}	with Thermal Compound (*3)	-	6.0	-	

Note *3: This is the value which is defined mounting on the additional cooling fin with thermal compound.

■ Characteristics (Representative)


Collector current vs. Collector-Emmitter voltage (typ.)

$T_j = 25^\circ\text{C}$ / chip

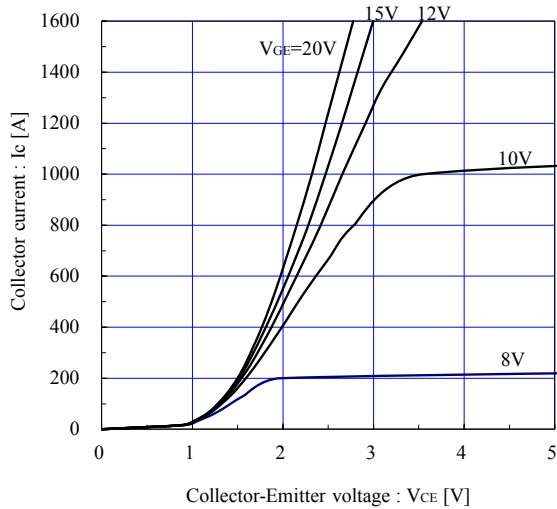


Collector current vs. Collector-Emmitter voltage (typ.)

$T_j = 125^\circ\text{C}$ / chip

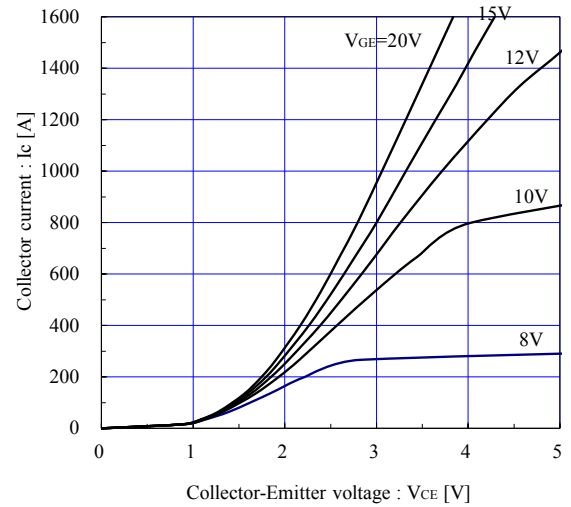


Collector current vs. Collector-Emmitter voltage (typ.)

$V_{GE} = 15\text{V}$ / chip

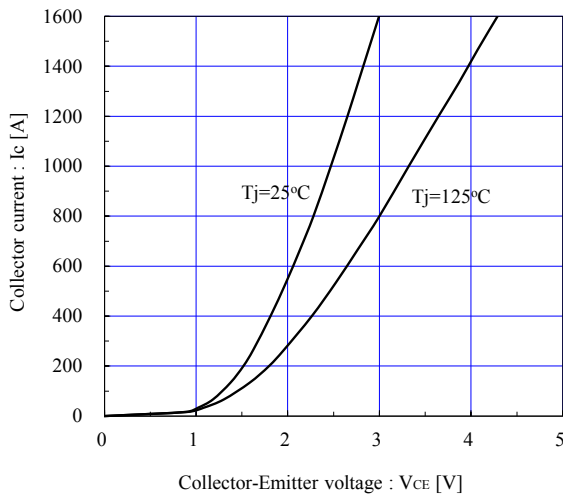


Collector-Emmitter voltage vs. Gate-Emmitter voltage (typ.)

$T_j = 25^\circ\text{C}$ / chip

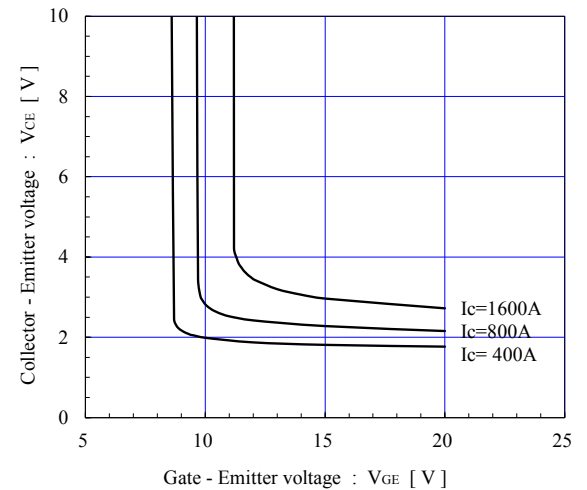


Capacitance vs. Collector-Emmitter voltage (typ.)

$V_{GE} = 0\text{V}$, $f = 1\text{MHz}$, $T_j = 25^\circ\text{C}$

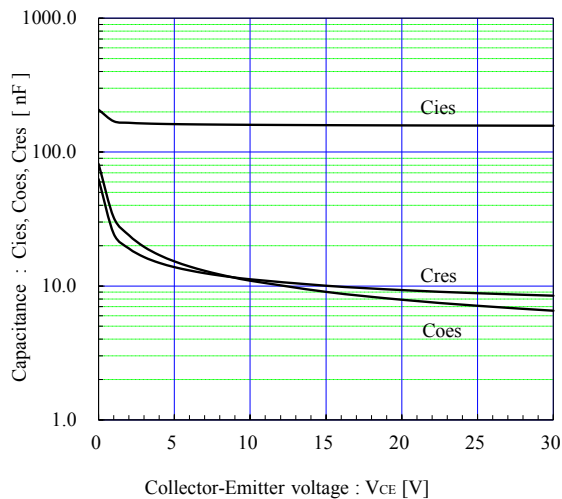


Dynamic Gate charge (typ.)

$V_{CC} = 1800\text{V}$, $T_j = 25^\circ\text{C}$

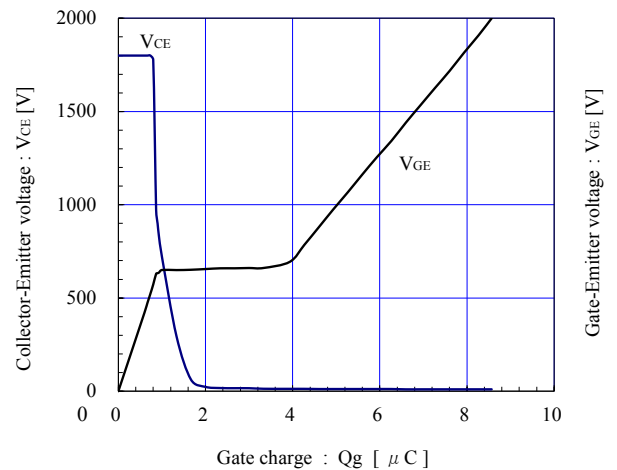


Switching time vs. Collector current (typ.)

$V_{CC}=1800V$, $V_{GE}=\pm 15V$, $R_g=2.4\Omega$, $T_j=25^\circ C$

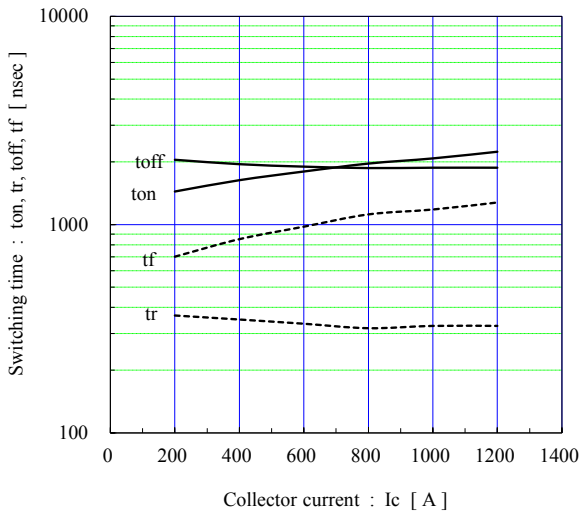


Switching time vs. Collector current (typ.)

$V_{CC}=1800V$, $V_{GE}=\pm 15V$, $R_g=2.4\Omega$, $T_j=125^\circ C$

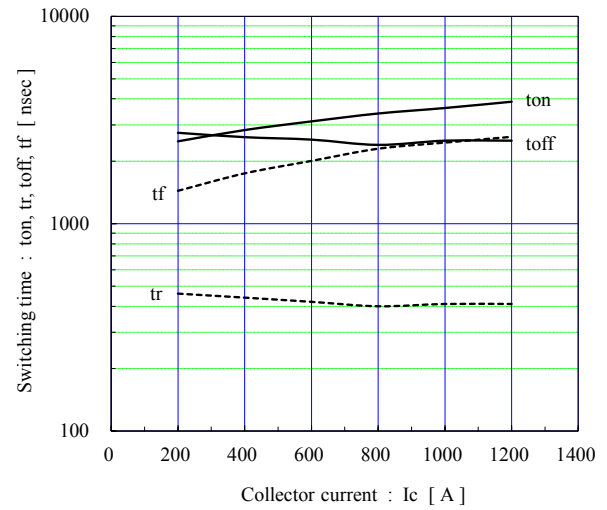


Switching time vs. Gate resistance (typ.)

$V_{CC}=1800V$, $I_c=800A$, $V_{GE}=\pm 15V$, $T_j=125^\circ C$

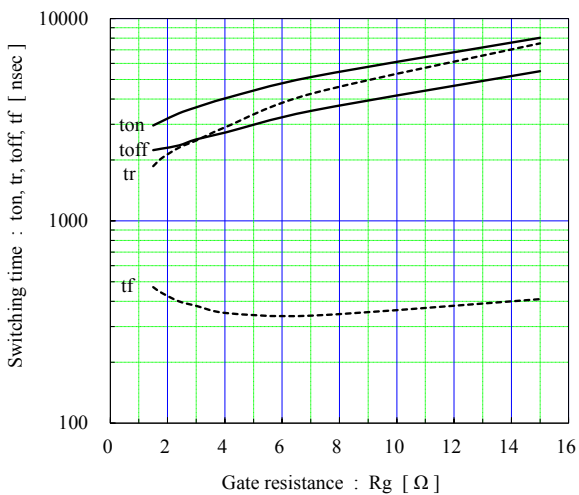


Switching loss vs. Collector current (typ.)

$V_{CC}=1800V$, $V_{GE}=\pm 15V$, $R_g=2.4\Omega$

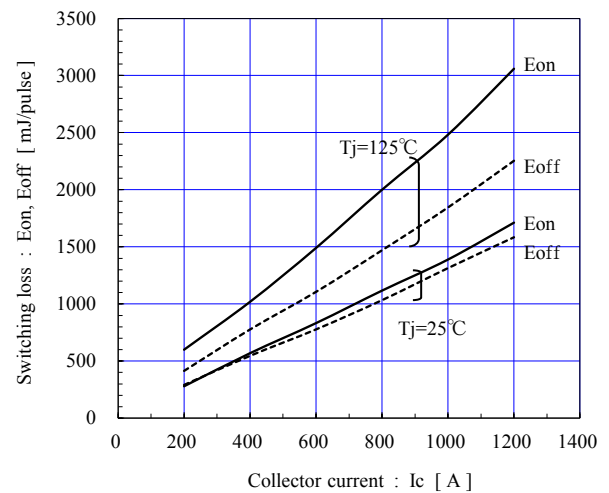


Switching loss vs. Gate resistance (typ.)

$V_{CC}=1800V$, $I_c=800A$, $V_{GE}=\pm 15V$, $T_j=125^\circ C$

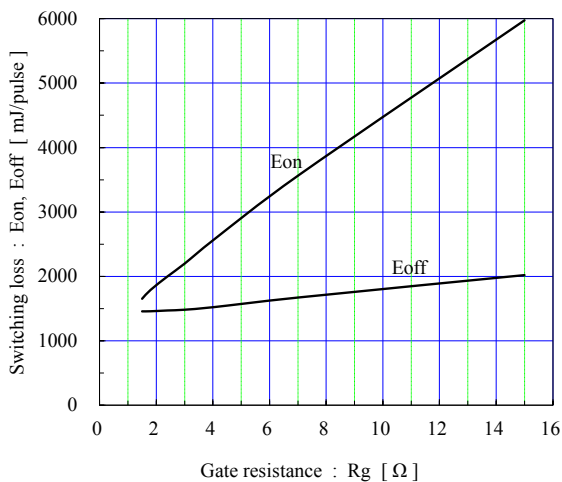


Reverse bias safe operating area (max.)


$\pm V_{GE}=15V$, $T_j=125^\circ C$ / chip

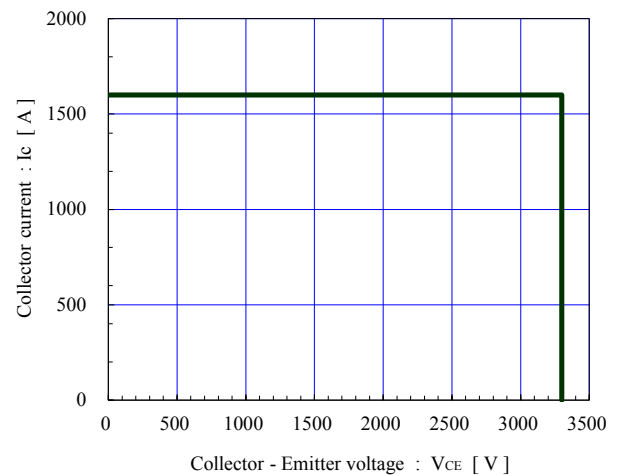


Forward current vs. Forward on voltage (typ.)
chip

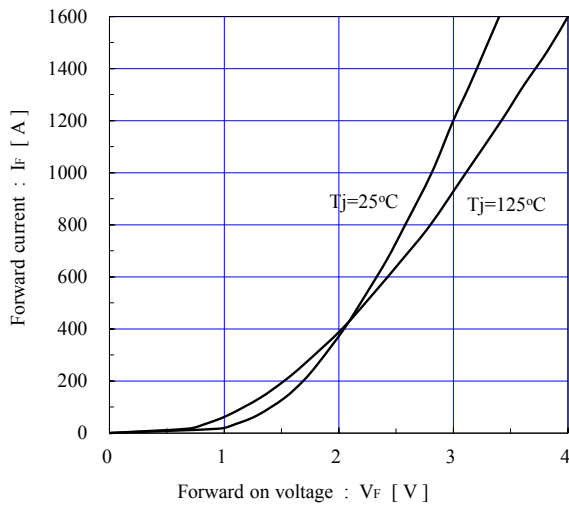


Switching loss vs. Collector current (typ.)
 $V_{CC}=1800\text{V}$, $V_{GE}=\pm 15\text{V}$, $R_g=2.4\Omega$

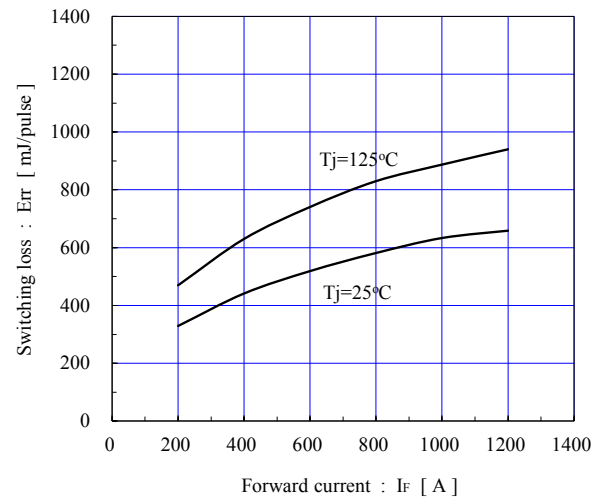


Switching loss vs. Gate resistance (typ.)
 $V_{CC}=1800\text{V}$, $I_F=800\text{A}$, $V_{GE}=\pm 15\text{V}$, $T_j=125^\circ\text{C}$

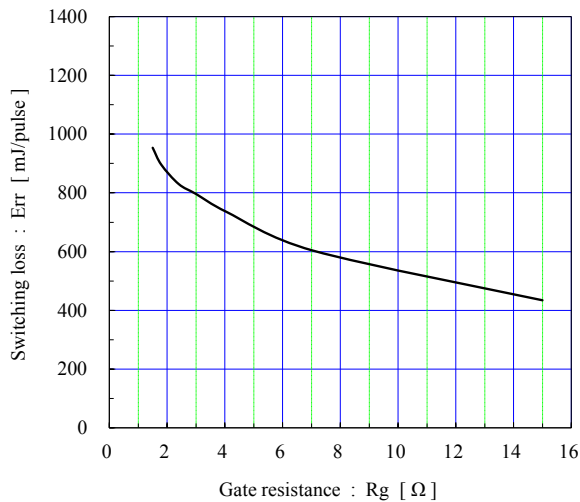


Reverse recovery characteristics (typ.)
 $V_{CC}=1800\text{V}$, $V_{GE}=\pm 15\text{V}$, $R_g=2.4\Omega$

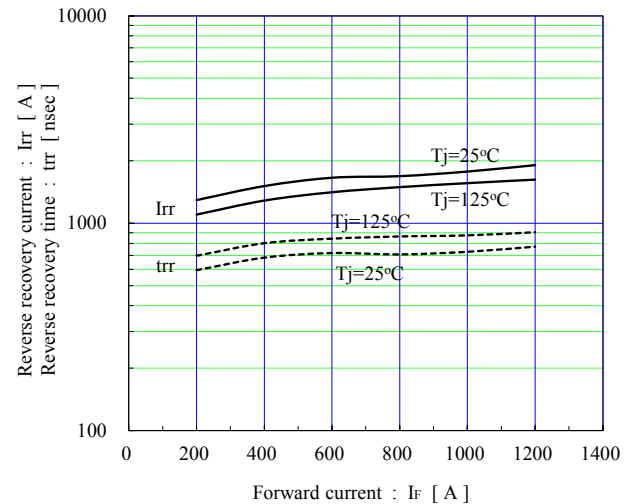


FWD safe operating area (max.)
 $T_j=125^\circ\text{C}$

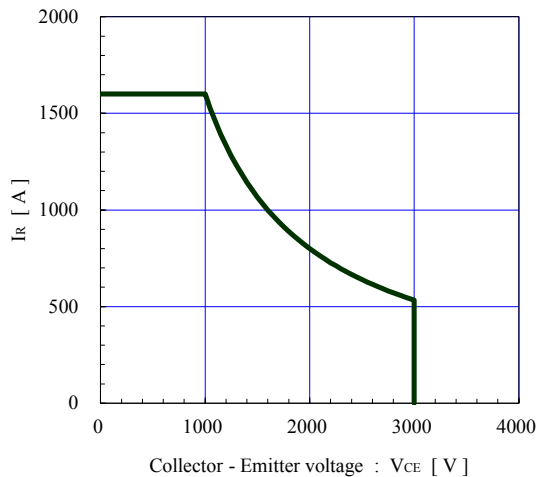


Transient thermal resistance (max.)

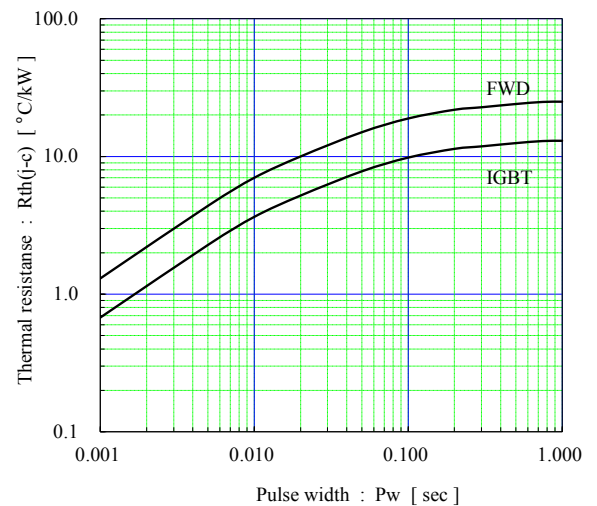

■ Outline Drawings, mm

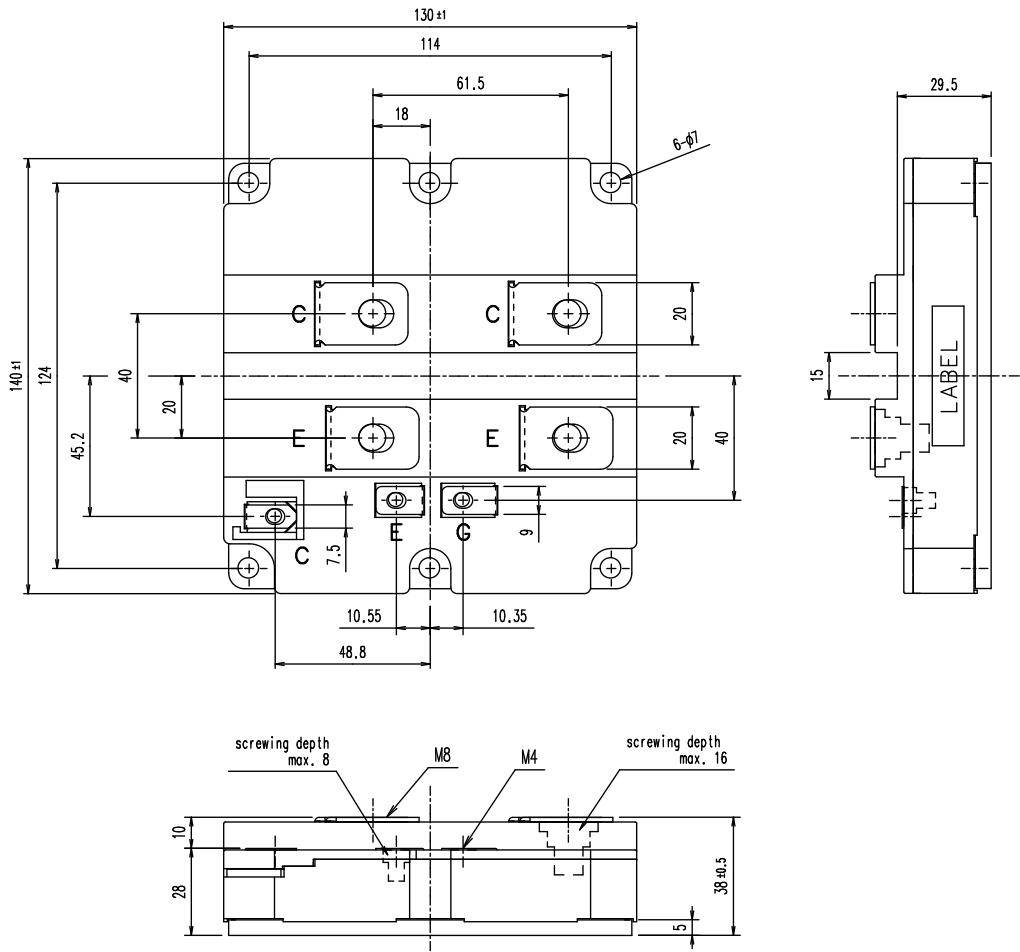

■ Equivalent Circuit Schematic

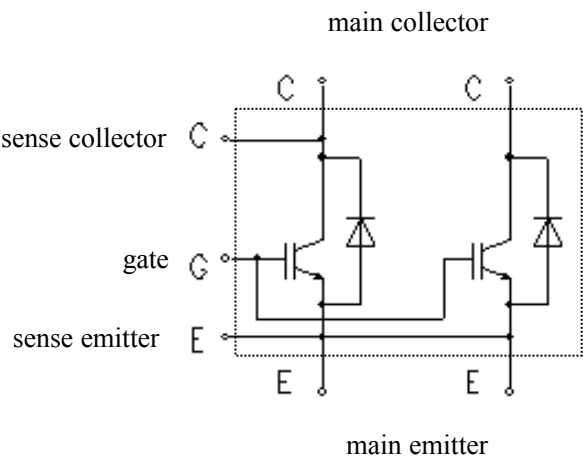

WARNING

- 1.This Catalog contains the product specifications, characteristics, data, materials, and structures as of September 2013.
The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
- 2.All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
- 3.Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
- 4.The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 - Computers • OA equipment • Communications equipment (terminal devices) • Measurement equipment
 - Machine tools • Audiovisual equipment • Electrical home appliances • Personal equipment • Industrial robots etc.
- 5.If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
 - Transportation equipment (mounted on cars and ships) • Trunk communications equipment
 - Traffic-signal control equipment • Gas leakage detectors with an auto-shut-off feature
 - Emergency equipment for responding to disasters and anti-burglary devices • Safety devices
 - Medical equipment
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
 - Space equipment • Aeronautic equipment • Nuclear control equipment
 - Submarine repeater equipment
7. Copyright ©1996-2013 by Fuji Electric Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.
- 8.If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.