




These Belt Driven Blower packages are provided with cast aluminum blower housings and aluminum closed impellers. The Blowers are provided in a clockwise rotation. Blower housing position may be changed from Horizontal to vertical discharge. Counter clockwise rotation may be provided. High performance V-belt pulley design provides compact design. All units are provided with mounting base and belt guard.


APPLICATIONS:

A few of the many applications are:

- Forced ventilation of control cabinets.
- Conveying of air at high system resistance
- Forced Air Supply for gas, oil and coal fired systems.
- Drying of ink for silkscreen and printing machines.
- Air Supply for air cushion tables.

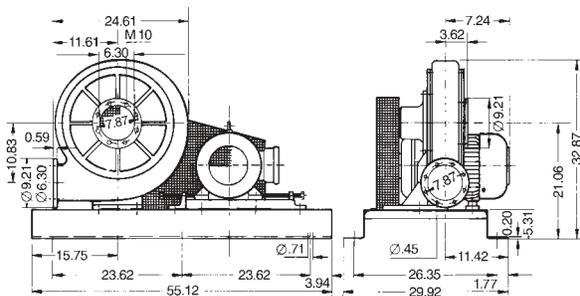

PERFORMANCE CURVE

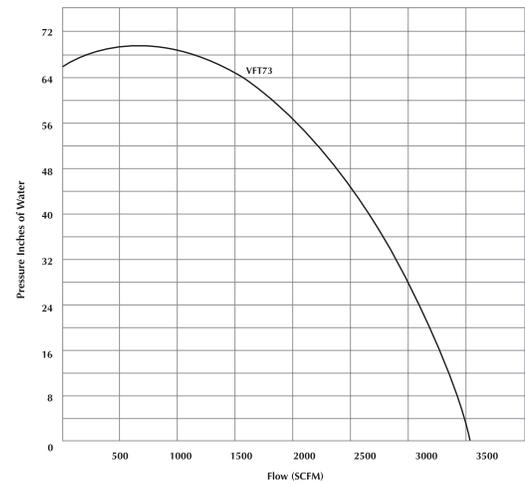

| Blower Model | Motor HP | Voltage | Phase | Frequency | Rated Current at 230/460V | Maximum Pressure inch H ₂ O | Maximum Flow SCFM | Weight lbs/kg |
|--------------|----------|----------|-------|-----------|---------------------------|--|-------------------|---------------|
| VFT73 | 30.0 | 230/460V | 3Φ | 60Hz | 72/36 | 69 | 3531 | 550/250 |