


SD 420 VFD 4-H

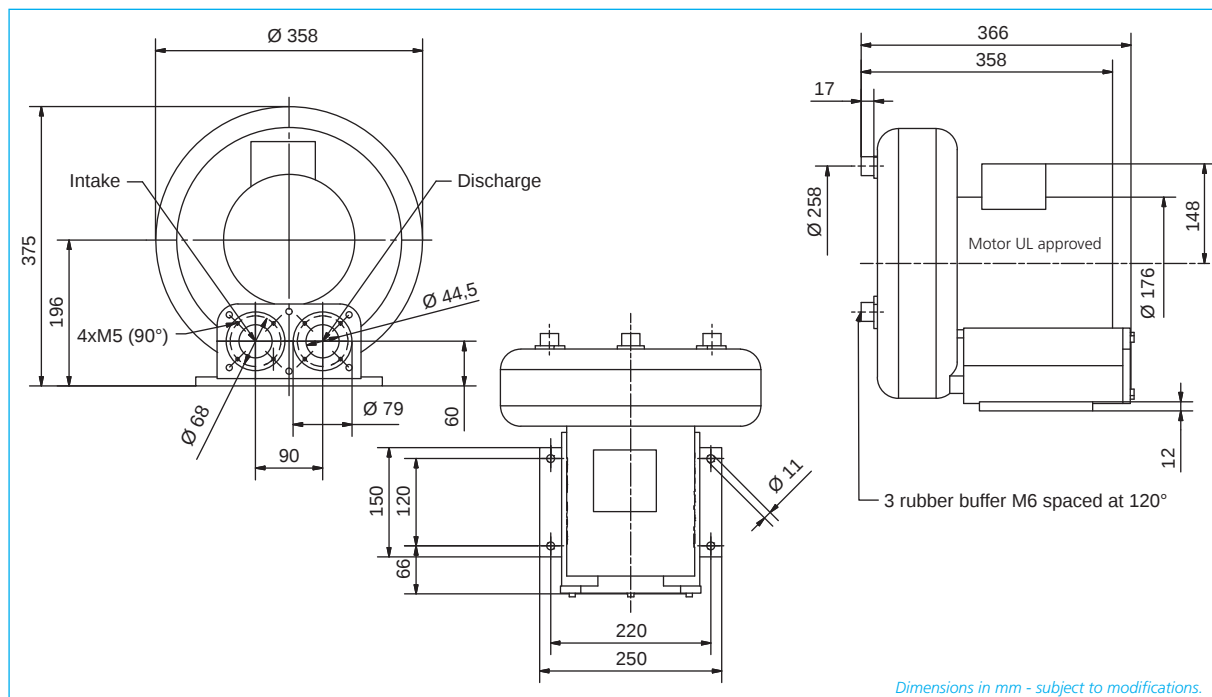


Dimensions in mm - subject to modifications.


Delivery includes inlet and outlet flanges NPT 1½".

Type	Efficiency class 	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.)
			$\dot{V}$ max.	Δp_t max.	$\dot{V}$ max.	Δp_t max.	Rated output	Voltage	Current	RPM	
		Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	lb
SD 420 VFD 4-H	NEMA Energy Efficient	60	120	145	120	112	3,5	265/460	8,0/4,65	3480	60

Pressure

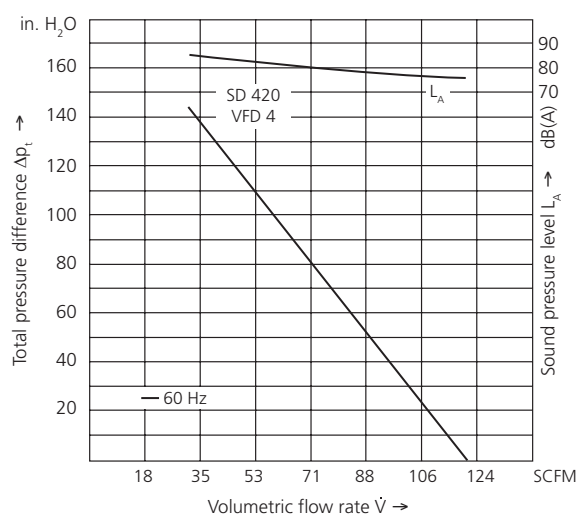

Vacuum

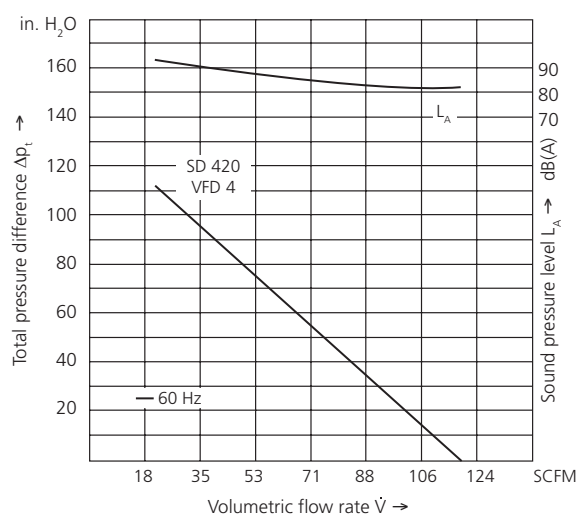

Elektror
airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektror.com
www.elektror.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielctric.com
www.americas.fujielctric.com