


SD 420 VFD 4-L

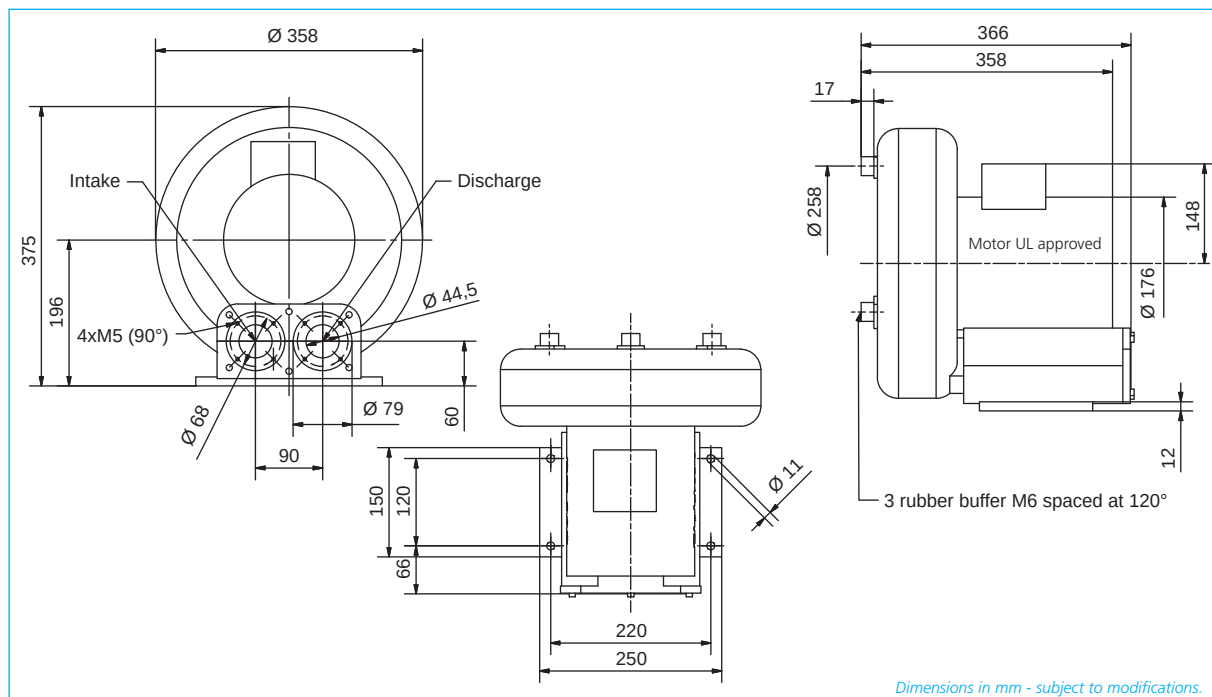


Dimensions in mm - subject to modifications.


Delivery includes inlet and outlet flanges NPT 1½".

Type	Efficiency class 	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.)
			$\dot{V}$ max.	Δp_t max.	$\dot{V}$ max.	Δp_t max.	Rated output	Voltage	Current	RPM	
		Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	lb
SD 420 VFD 4-L	NEMA Energy Efficient	60	120	145	120	112	3,5	230/400	9,20/5,30	3480	60

Pressure

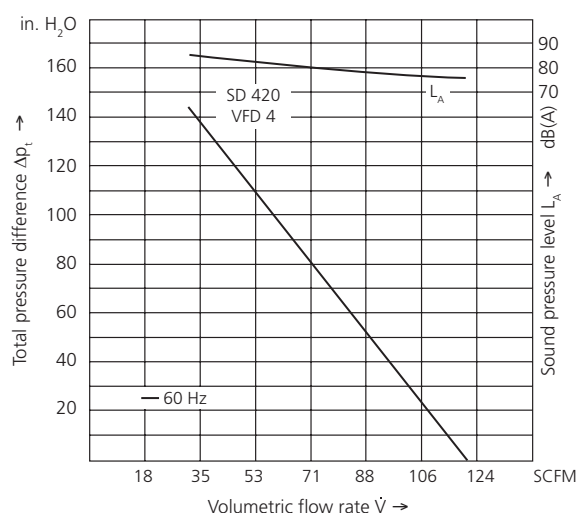

Vacuum

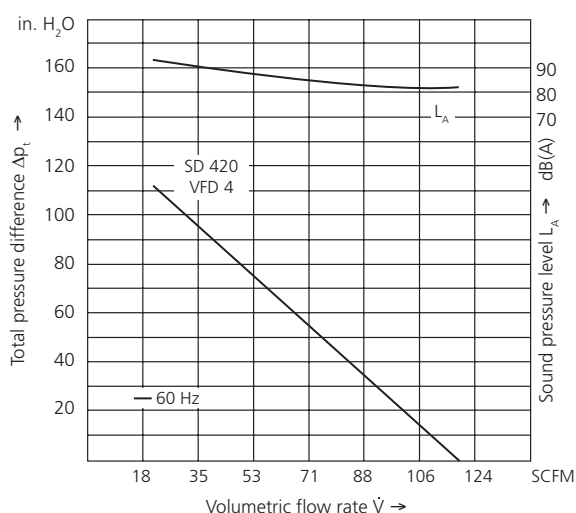

Elektorr
airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektorr.com
www.elektorr.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielctric.com
www.america.fujielctric.com