



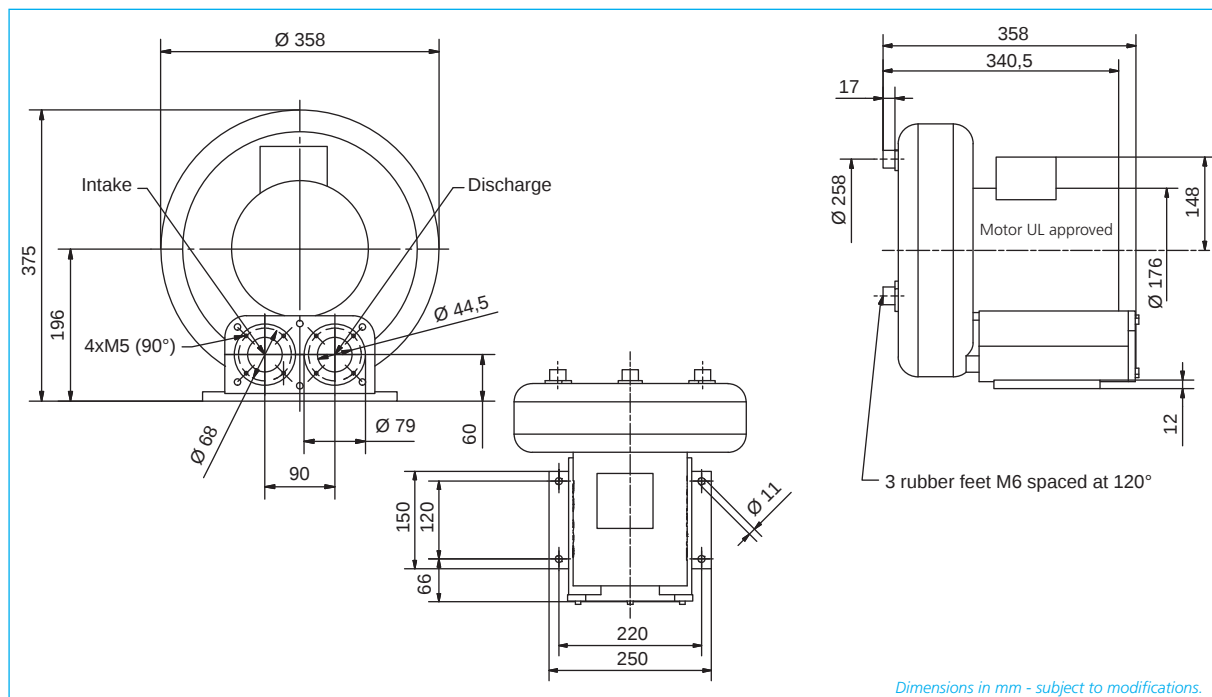


Delivery includes inlet and outlet flanges NPT 1½".

Type	Efficiency class 	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.)
			$\dot{V}$ max.	Δp_t max.	$\dot{V}$ max.	Δp_t max.	Rated output	Voltage	Current	RPM	
SE 42 VFD 42S	NEMA Energy Efficient	60	120	112	120	104	2,7	230	12,0	3480	51

Pressure

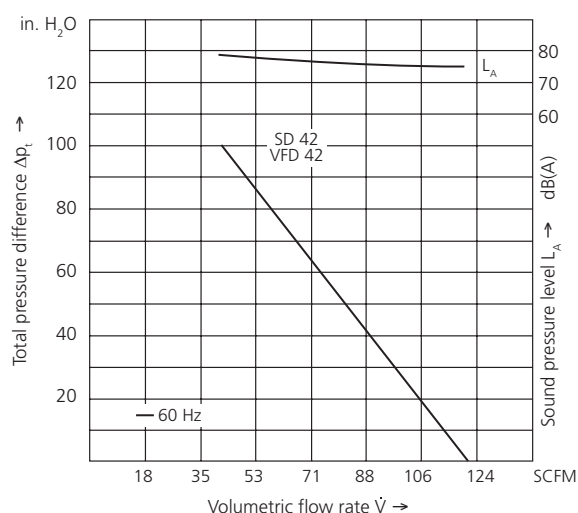

Vacuum

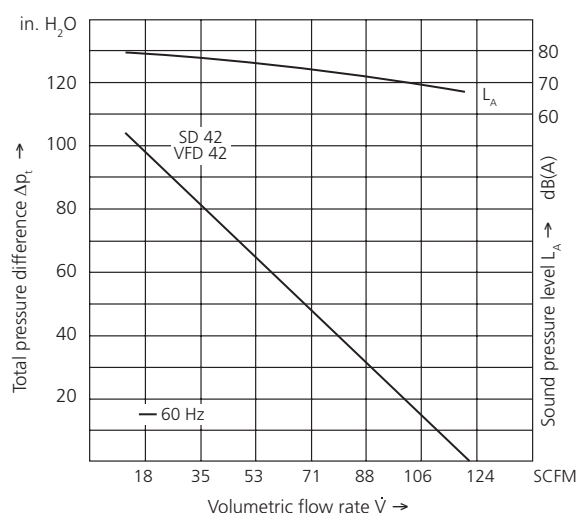

Elektorr
airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektorr.com
www.elektorr.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielctric.com
www.america.fujielctric.com