

SCHOTTKY BARRIER DIODE**Features**

- Low VF
- Super high speed switching.
- High reliability by planer design.

Applications

- High speed power switching.

Maximum Ratings and Characteristics**Absolute Maximum Ratings**

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V _{RRM}		40	V
Repetitive peak surge reverse voltage	V _{RSM}	t _w =500ns, duty=1/40	48	V
Isolating voltage	V _{iso}	Terminals to Case, AC. 1min.	1500	V
Average output current	I _O	duty=1/2, T _c =125°C Square wave	5*	A
Surge current	I _{FSM}	Sine wave 10ms	100	A
Operating junction temperature	T _j		-40 to +150	°C
Storage temperature	T _{stg}		-40 to +150	°C

* Out put current of centertap full wave connection.



Electrical Characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop **	V _F	I _F =2.0A	0.55	V
Reverse current **	I _R	V _R =V _{RRM}	5.0	mA
Thermal resistance	R _{th(j-c)}	Junction to case	3.5	°C/W






** Rating per element

Mechanical Characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

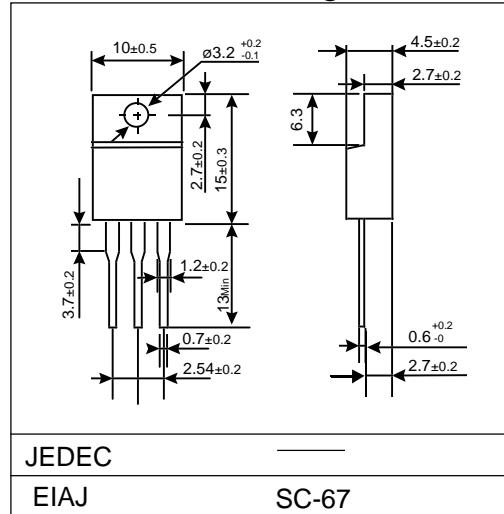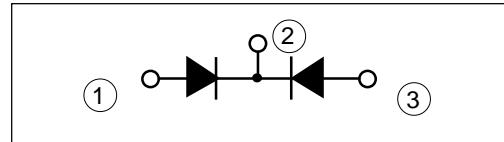Outline Drawings**Connection Diagram**

■ Characteristics

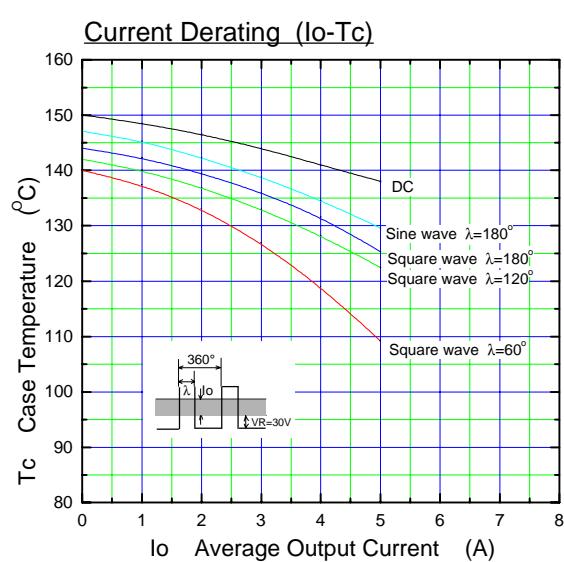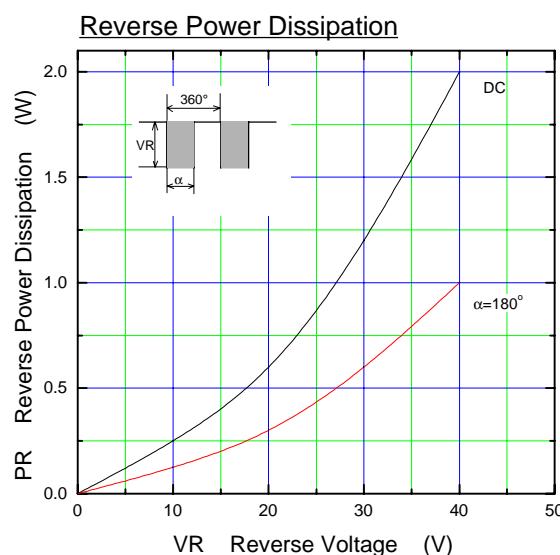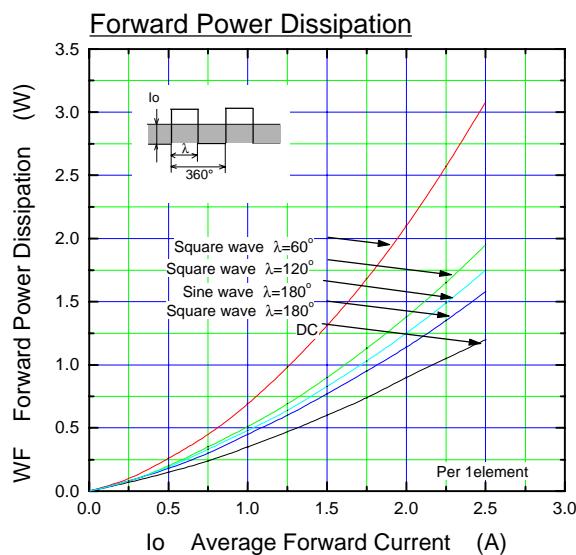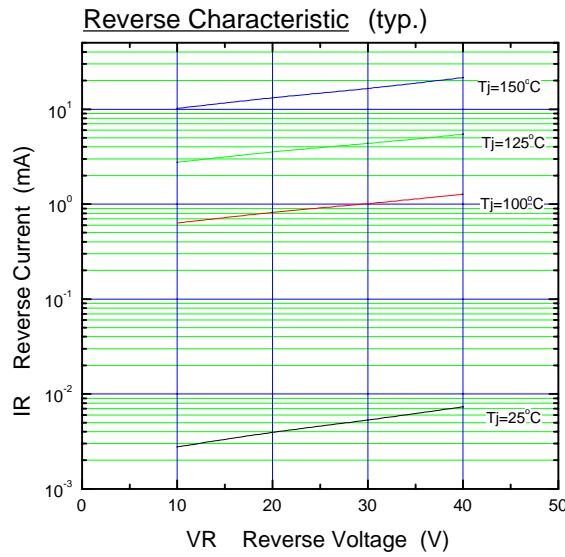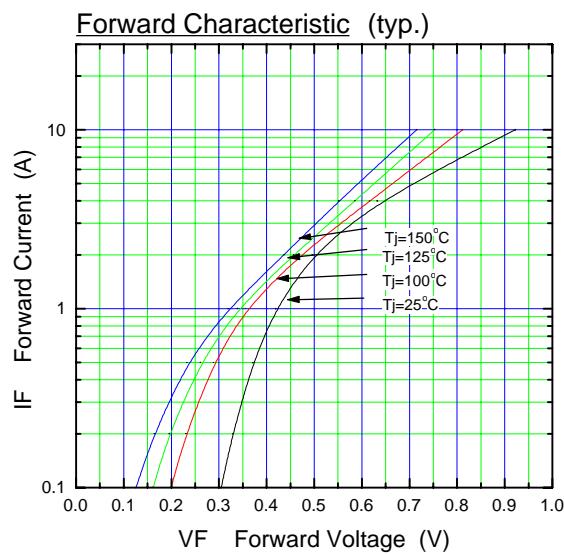

λ : Conduction angle of forward current for each rectifier element
 I_o : Output current of center-tap full wave connection

