


NEMA Premium

**IE3**

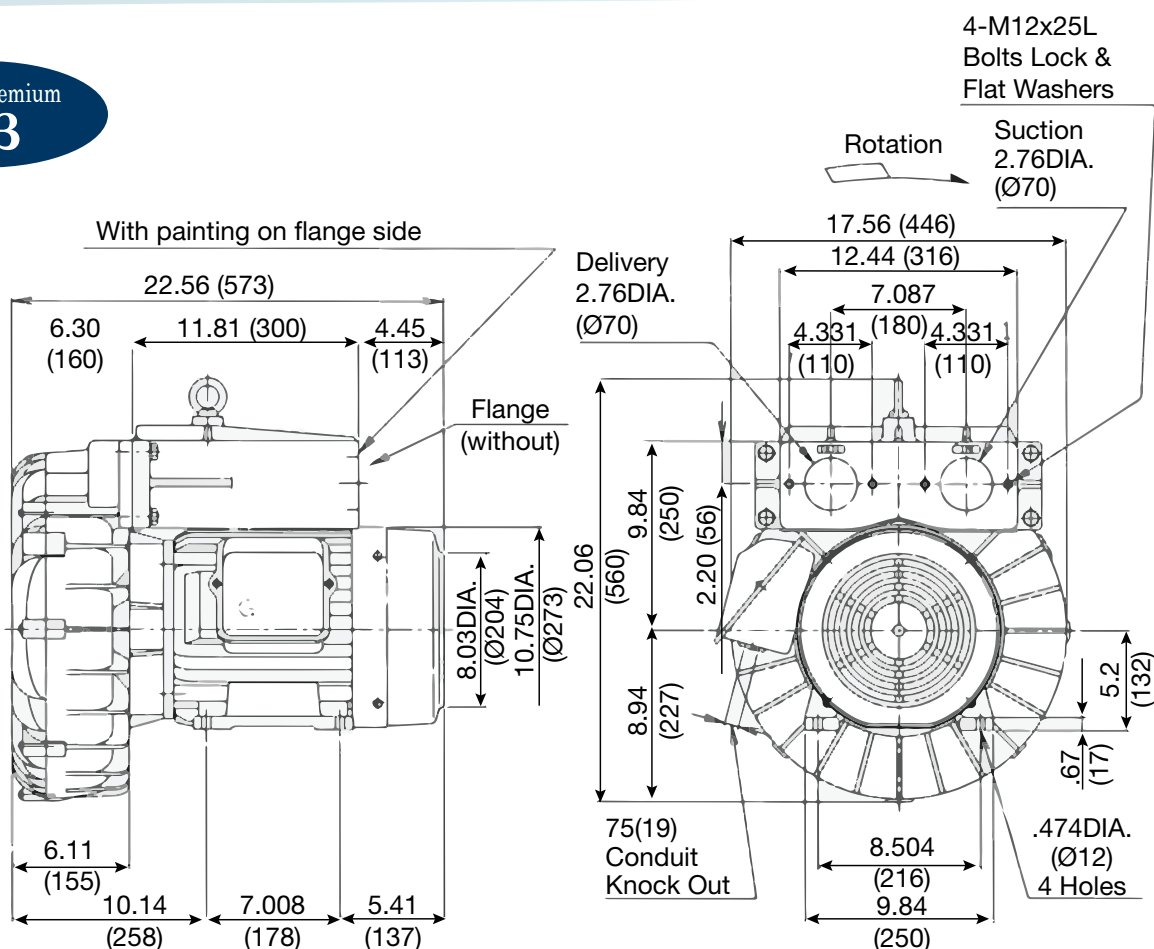

## Specifications

**UL** **us** **CSA** **CE** ☒ RoHS Compliant

| Model                                | VFC805A-7WS    |
|--------------------------------------|----------------|
| HP                                   | 11.0           |
| Hz                                   | 60             |
| Phase                                | 3              |
| Voltage                              | 208-230/460    |
| Max. Amps                            | 27.8-25.2/12.6 |
| Locked Rotor Amps                    | 252-270/135    |
| Max. Pressure (in. H <sub>2</sub> O) | 135            |
| Max. Vacuum (in. H <sub>2</sub> O)   | 108            |
| Max. Airflow Pressure (SCFM)         | 379            |
| Max. Airflow Vacuum (SCFM)           | 341            |
| Min. Airflow Pressure (SCFM)         | 132            |
| Min. Airflow Vacuum (SCFM)           | 0              |
| Max. Air Temperature Rise (°F)       | 145            |
| Weight (lbs.)                        | 287            |


— 60 Hz  
— 50 Hz

### PRESSURE

AMPS  
(60Hz/230V/3 PH)  
(50Hz/200V/3 PH)

INPUT  
(kW)

STATIC  
PRESSURE  
(Inch H<sub>2</sub>O)

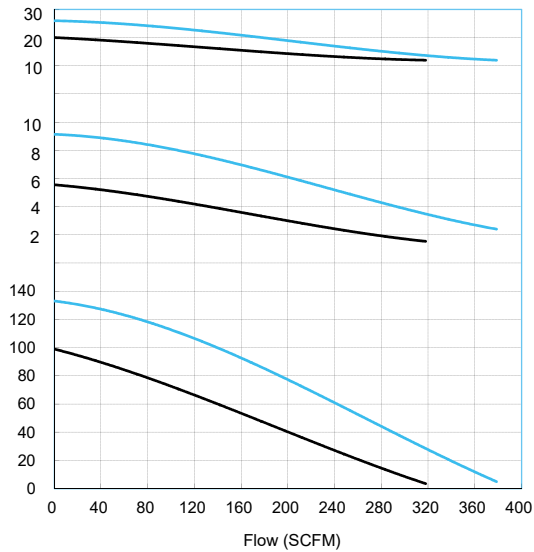


### VACUUM


AMPS  
(60Hz/230V/3 PH)  
(50Hz/200V/3 PH)

INPUT  
(kW)

STATIC  
PRESSURE  
(Inch H<sub>2</sub>O)

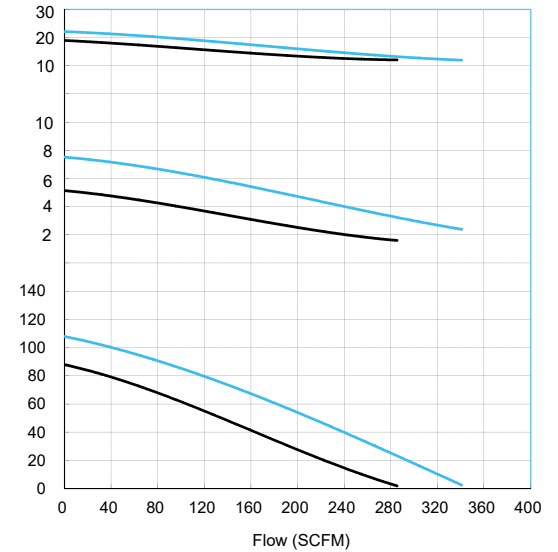

### TEMPERATURE RISE

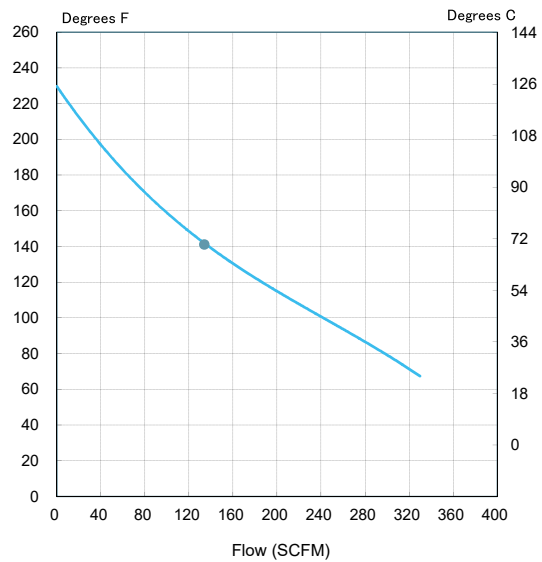

Max. Air Temperature is Value Marked •  
plus 40 Degrees C Ambient Temperature

**FE Fuji Electric**

Fuji Electric Corp. of America  
47520 Westinghouse Dr., Fremont, CA 94539  
x-fea-rc-group@fujielectric.com