


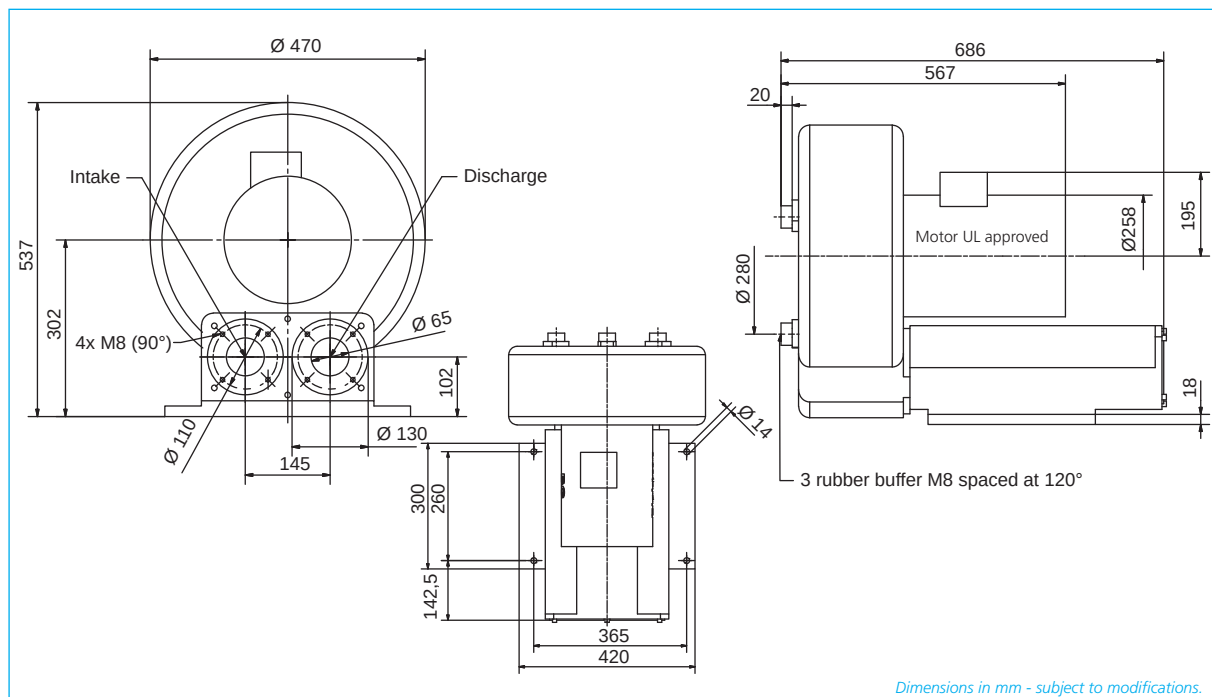


Dimensions in mm - subject to modifications.


Delivery includes inlet and outlet flanges NPT 2½".

Type	Efficiency class 	Frequency Hz	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			V max. SCFM	Δp_t max. in. H ₂ O	V max. SCFM	Δp_t max. in. H ₂ O	Rated output hp	Voltage V	Current A	RPM min ⁻¹	
SD 6400 VFD 6D-H	NEMA Energy Efficient	60	226	237	226	157	12	460 Δ	14,1	3530	205

Pressure

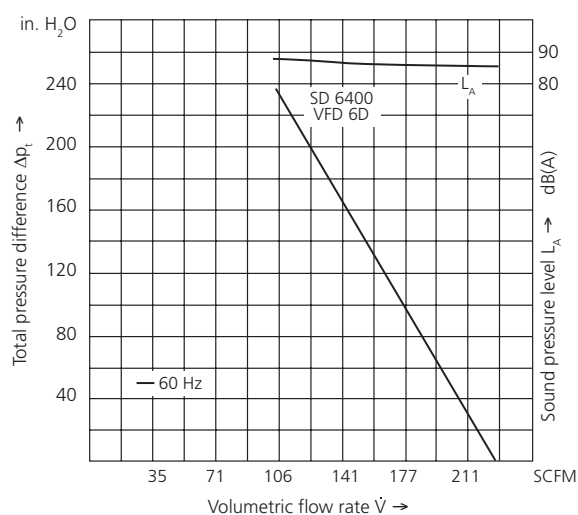

Vacuum

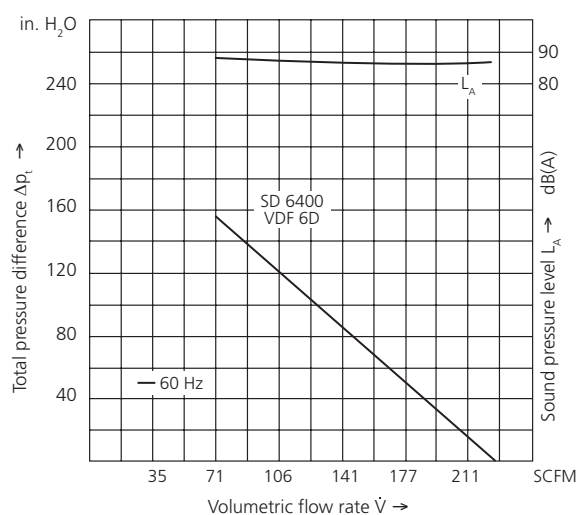

Elektorr
airsystems gmbh

Hellmuth-Hirth-Str. 2
73760 Ostfildern
Germany
sales@elektorr.com
www.elektorr.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
rc-group@fecoa.fujielectric.com
www.americas.fujielectric.com