


SD 6400 VFD 6D-L

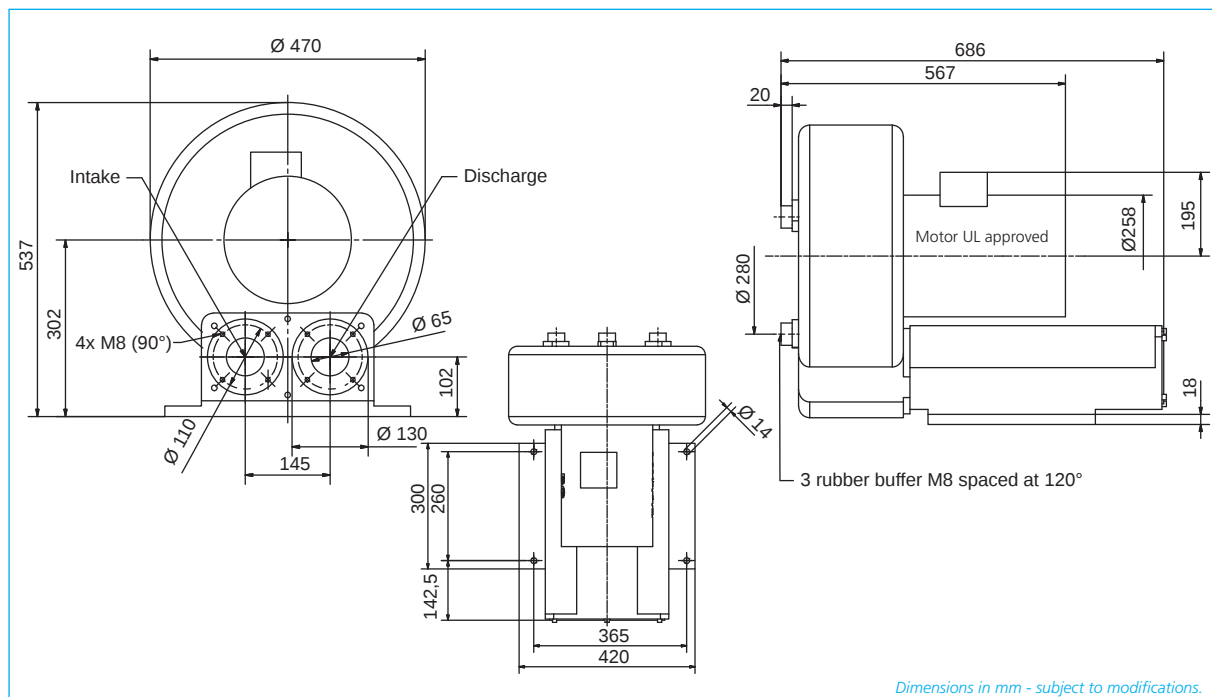


Dimensions in mm - subject to modifications.


Delivery includes inlet and outlet flanges NPT 2½".

Type	Efficiency class	Frequency	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.)
			V max.	Δp_t max.	V max.	Δp_t max.	Rated output	Voltage	Current	RPM	
		Hz	SCFM	in. H ₂ O	SCFM	in. H ₂ O	hp	V	A	min ⁻¹	lb
SD 6400 VFD 6D-L	NEMA Energy Efficient	60	226	237	226	157	12	230/400	28,1/16,2	3530	205

Pressure

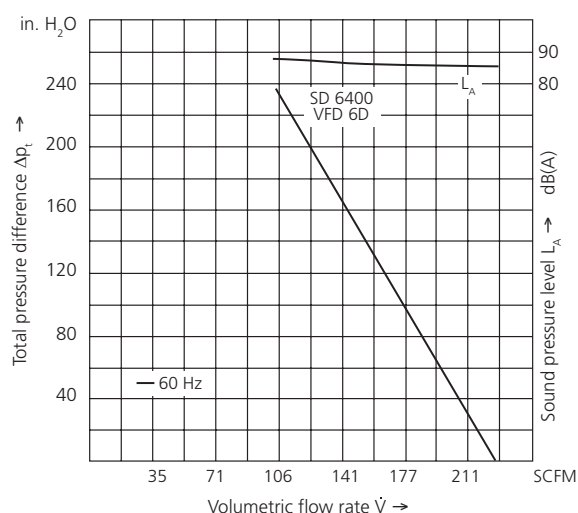

Vacuum

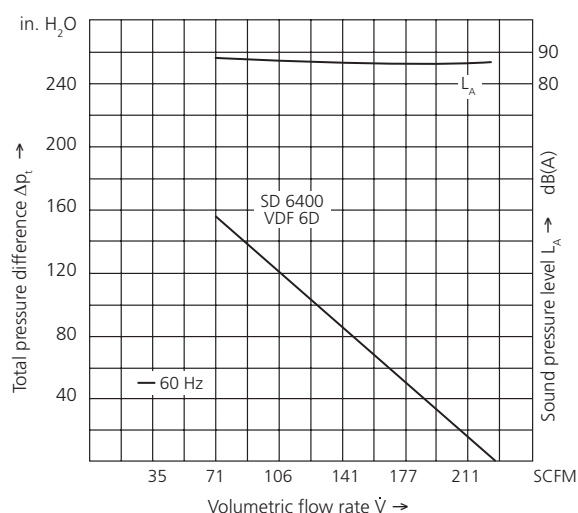

Elektorr
airsystems gmbh

Hellmuth-Hirth-Str. 2
73760 Ostfildern
Germany
sales@elektorr.com
www.elektorr.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
rc-group@fecoa.fujielectric.com
www.americas.fujielectric.com