

## TIME DELTA SERIES

# ULTRASONIC FLOWMETER <M-Flow PW>

### DATA SHEET

FLR-4, FSS, FLY

This flowmeter is a clamp-on type ultrasonic flow meter based on transit-time measuring method. Making full use of the latest electronics and digital signal processing technologies, we realized the equipment with improved anti-bubble performance and high accuracy. The communication function (MODBUS: Option) is also applicable.

## FEATURES

### 1. High accuracy

Standard accuracy:  $\pm 1.5\%$  ( $\pm 1.0\%$  is also available)  
Adoption of new sound velocity measurement system permits measurements of fluids of unknown sound velocity. Further, affection from fluid temperature and pressure is negligible.

### 2. Compact and light-weight

Thanks to the adoption of the latest electronics, the flow transmitter is compact size and light weight.

### 3. Quick response

With the use of high-speed micro-processor suited for digital signal processing, the fast response time is realized.

### 4. Multi-lingual

The following languages are supported for display:  
Japanese (Katakana), English, German French, and Spanish.

### 5. Excellent performance and easy operation

LCD and function keys are allowing easy configuration and trouble shooting.

- LCD with back light
- Easy mounting of sensor
- Extendable rail type detector up to  $\Phi 50$  to  $\Phi 1200\text{mm}$
- Easy operation with keypad on the front surface of the flow transmitter
- With RS-485 communication function (Option)



Flow transmitter (FLR)



Detector (FSSA)



Detector (FSSC)

## SPECIFICATIONS

### Operational specifications

#### System configuration:

Single-path system of a flow transmitter (Model FLR) and a detector (Model FSS)

#### Applicable detector:

FSSA (2MHz), FSSC (1MHz)

#### Applicable fluid:

Homogenous liquid where the ultrasonic signal can be transmitted  
Bubble quantity: 0 to 12vol% (for pipe size 50A, water, velocity 1m/s)  
Fluid turbidity: 10000mg/L max.  
Type of flow: Fully-developed turbulent or laminar flow in a full-filled pipe

#### Flow velocity range:

0 to  $\pm 0.3 \dots \pm 10\text{m/s}$

**Power supply:** 100 to 240V AC +10%/-15%, 50/60Hz;  
or 20 to 30V DC

**Signal cable (between detector and converter):**  
Coaxial cable (5m standard, 60m max.)  
Heat resistance: 80°C

**Installation environment:**  
Non-explosive area without direct sunlight,  
vibration, and corrosive gas and heat  
radiation  
Pollution degree 2 (Indoor use unaffected  
by dust, dirt, or moisture)

**Ambient temperature:**  
Flow transmitter: -20 to +50°C  
Detector: -20 to +60°C

**Ambient humidity:**  
90%RH max.

**Grounding:** Class D (100 Ω or less)

**Arrester:** Provided as standard at power supply

**Applicable piping and fluid temperature:**

| Detector Type | Pipe size (inner diameter) | Applicable pipe material                                                                               | Mounting method | Fluid temperature range (Note 3)                    |
|---------------|----------------------------|--------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------|
| FSSA          | ø25 to ø50 mm              | Plastic (PVC, etc.) (Note 1)                                                                           | V method        | -20 to +100°C<br>Heat shock resistance 150°C, 30min |
|               | ø50 to ø225 mm             | Plastic (PVC, etc.) (Note 1)<br>Metal pipe (SS, steel pipe, copper pipe, aluminum pipe, etc.) (Note 2) |                 |                                                     |
| FSSC          | ø50 to ø600 mm             |                                                                                                        | Z method        | -40 to 120°C                                        |
|               | ø200 to ø1200 mm           |                                                                                                        |                 |                                                     |

Note 1: Limit of pipe wall thickness for FSSA: 15mm or less for PP, 9mm or less for PVDF

Note 2: For cast iron pipe, lining pipe, old steel pipe or others through which the ultrasonic signal could not be transmitted easily, select FSSC.  
Lining material: Tar epoxy, mortar, rubber, etc.

\* In case the lining is not glued to a pipe, the measurement may be impossible.

Straight pipe length: Typically 10D for upstream and 5D for downstream.

(D: Pipe inner diameter)

Refer to conditions on straight pipe for details (Japan Electric Measuring Instruments Manufacturers' Association Standard JEMIS-032).

Note 3: If silicone-free grease is used as acoustic coupler, the fluid temperature range is 0 to 60°C regardless of the detector.

Note 4: For pipes with a diameter of 300 mm or larger, we recommend to use FSSC and mount it by Z method.

## Performance specifications

**Rated accuracy:**

<Standard type>

Plastic pipe

| Detector Type | Internal diameter | Velocity: 2m/s or higher | Velocity: Less than 2m/s |
|---------------|-------------------|--------------------------|--------------------------|
| FSSA          | ø25 to ø50mm      | ±2.5% of rating          | ±0.05m/s                 |
| FSSA, C       | ø50 to ø1200mm    | ±1.5% of rating          | ±0.03m/s                 |

Metal pipe

| Detector Type | Internal diameter | Velocity: 2m/s or higher | Velocity: Less than 2m/s |
|---------------|-------------------|--------------------------|--------------------------|
| FSSA, C       | ø50 to ø1200mm    | ±2% of rating            | ±0.04m/s                 |

<High accuracy type>

Plastic pipe and metal pipe

| Detector Type | Internal diameter | Velocity: 2m/s or higher | Velocity: Less than 2m/s |
|---------------|-------------------|--------------------------|--------------------------|
| FSSA          | ø50 to ø225mm     | ±1.0% of rating          | ±0.02m/s                 |
| FSSC          | ø200 to ø1200mm   | ±1.0% of rating          | ±0.02m/s                 |

**Response time:** 1.0s (standard mode)  
0.2s as selected (quick response mode)

**Power consumption:**

15VA max. (AC power supply)

6W max. (DC power supply)

## Functional specifications

**Analog signal:** 4 to 20mA DC (1 point)  
Load resistance: 600Ω max.

**Digital output:** Forward total, reverse total, alarm, acting range, flow switch, total switch assignable arbitrarily  
Transistor contact (isolated, open collector)  
• Outputs: 2 points  
• Normal: ON/OFF selectable  
• Contact capacity: 30V DC, 50mA  
• Output frequency: 1000P/s max. (pulse width: 5, 10, 50, 100, 200, 500, 1000ms)

**Serial communication (option):**

RS-485 (MODBUS), isolated  
Connectable quantity: 31 units  
Baud rate: 9600, 19200, 38400bps  
Parity: None/Odd/Even selectable  
Stop bits: 1 or 2 bits selectable  
Cable length: 1km max.  
Data: Flow velocity, flow rate, forward total, reverse total, status, etc.

**Display device:** 2-color LED (Normal: green, Extraordinary: red)  
LCD with 2 lines of 16 characters and back light

**Indication language:**

Japanese (Katakana)/English/French/  
German/Spanish (changeable)

**Flow velocity/flow rate indication:**

Instantaneous flow velocity, instantaneous flow rate indication (minus indication for reverse flow)

Numerals: 8 digits (decimal point is counted as 1 digit)

Unit: Metric/Inch system selectable

|           | Metric system                                                                                                    | Inch system                                                                                                                       |
|-----------|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Velocity  | m/s                                                                                                              | ft/s                                                                                                                              |
| Flow rate | L/s, L/min, L/h, L/d, kL/d, ML/d, m³/s, m³/min, m³/d, km³/d, Mm³/d, BBL/s, BBL/min, BBL/h, BBL/d, kBBL/d, MBBL/d | gal/s, gal/min, gal/h, gal/d, kgal/d, Mgal/d, ft³/s, ft³/min, ft³/d, Kft³/d, Mft³/d, BBL/s, BBL/min, BBL/h, BBL/d, kBBL/d, MBBL/d |

Note: The "gal" means USgal.

**Total indication:** Forward or reverse total value indication (negative indication for reverse direction)

Numerals: 8 digits (decimal point is counted as 1 digit)

Unit: Metric/Inch system selectable

|       | Metric system                        | Inch system                                          |
|-------|--------------------------------------|------------------------------------------------------|
| Total | mL, L, m³, km³, Mm³, mBBL, BBL, KBBL | gal, kgal, ft³, kft³, Mft³, mBBL, BBL, KBBL, ACRE-ft |

**Configuration:** Fully configurable from the 4-key pad (ESC, △, ▽, ENT)

**Zero adjustment:** Set zero/Clear available

**Damping:** 0 to 100s (every 0.1s) for analog output and flow velocity/flow rate indication

**Low flow rate cutoff:**

0 to 5m/s in terms of flow velocity

**Alarm:** Digital output available for Hardware fault or Process fault

**Burnout:** Analog output: Hold/Overscale/Under-scale/Zero selectable  
Flow rate total: Hold/Count selectable  
Burnout timer: 10 to 900s (every 1s)

**Bi-directional range:** Forward and reverse ranges configurable independently.  
Hysteresis: 0 to 10% of working range  
Working range applicable to digital output

**Auto-2 range:** 2 forward ranges configurable independently  
Hysteresis: 0 to 10% of working range  
Working range applicable to digital output

**Flow switch:** Lower limit, upper limit configurable independently  
Digital output available for status at actuated point

**Total switch:** Forward total switching point configurable  
Digital output available when actuated

**External total preset:** Preset total settable upon contact input setting

**Backup of power failure:** backup by non-volatile memory

### Physical specifications

**Type of enclosure:**  
Flow transmitter: FLR: IP65  
Detector: Verified to meet IP65 performance standards (not SGS certified).  
Note: Waterproof performance is valid only when using a waterproof BNC connector.

**Mounting method:**  
Flow transmitter: Mounted on wall or by 2B pipe  
Detector: Clamped on pipe surface

**Acoustic coupler:**  
Silicone rubber or silicone-free grease  
Note: The acoustic coupler is a medium that eliminates a gap between detector and pipe

Type of acoustic coupler:

| Type              | Silicone rubber (KE-348W) | Silicone-free grease (HIGH Z) |
|-------------------|---------------------------|-------------------------------|
| Fluid temperature | -40 to +150°C             | 0 to +60°C                    |
| Teflon piping     | ×                         | ○                             |

In case of Teflon piping, use grease.

**Material:** Flow transmitter: Plastic alloy  
Detector:

| Detector Type | Sensor housing | Guide rail               |
|---------------|----------------|--------------------------|
| FSSA          | PBT            | SUS304                   |
| FSSC          | PBT            | Aluminum alloy + plastic |

**Signal cable:** Type: FLYA  
• Structure: Heat-resisting high-frequency coaxial cable (3D2V)  
• Sheath: Flame-resisting PVC  
• Outer diameter: ø5mm  
• Termination: Bar terminal (flow transmitter side) and BNC connector (sensor side)  
• Mass: Approx. 45g/m

**Dimensions:** Flow transmitter:  
H140×W137×D68mm  
Detector: H50×W348×D34mm (FSSA)  
H88×W480×D53mm (FSSC)

**Mass:** Flow transmitter: 0.8kg  
Detector: 0.4kg (FSSA)  
1.0kg (FSSC)

**External terminal of flow transmitter:** plug terminal

### Standards & Certifications



#### LVD (2014/35/EU)

EN 61010-1:2010+A1:2019

#### EMC (2014/30/EU)

EN 55011:2016+A1:2017+A11:2020+A2:2021, Group 1, Class A

EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A1:2019+A2:2021

EN IEC 61326-1:2021, Table2

EN IEC 61326-2-3:2021

#### RoHS (2011/65/EU+(EU)2015/863)

EN IEC 63000:2018



#### LVD (S.I.2016 No.1101)

EN 61010-1:2010+A1:2019

#### EMC (S.I.2016 No.1091)

EN 55011:2016+A11:2020+A2:2021, Group 1, Class A

EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A1:2019+A2:2021

EN IEC 61326-1:2021

EN IEC 61326-2-3:2021

#### RoHS (S.I.2012 No.3032)

EN IEC 63000:2018



#### General Requirements:

UL 61010-1, 3rd Ed., Rev. November 15, 2024

#### NRTL Contract No.:

803846

#### Country Designation:

US only

### ■ PC Loader software

You can download the software from the Fuji Electric website.  
Loader software is not covered by quality assurance.

•PC/AT compatible computer

•Main functions: Software for displaying and changing various product parameters and collecting measurement data

Instantaneous flow rate, instantaneous flow velocity, total values, and error information, etc. can be imported.

•OS (verified): Windows 10 (32-bit, 64-bit),  
Windows 11 (64-bit)

•Memory requirement: 125MB or more

•Hard disk capacity: Minimum available capacity of 52MB or more

Note: To use serial communication, the 6th digit of the product code symbol must be selected as "D". (optional)

Note: Communication converter

To connect the flowmeter to the PC with USB interface, a USB RS-485 converter is required.


<Recommendation>

[USB - RS-485 converter]

Model number: SI-35USB-2 LINEEYE CO., LTD.


## MEASURING PRINCIPLE

With ultrasonic pulses propagated diagonally between the upstream and downstream sensors, flow rate is measured by detecting the time difference obtained by the flow of fluid.

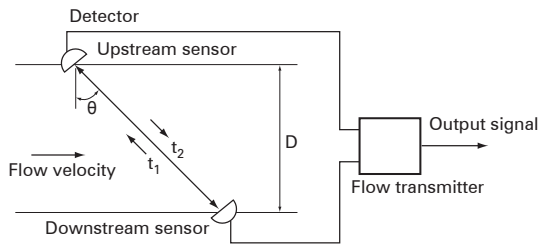


## CONFIGURATION DIAGRAM


### (1) Single-path system (V method)

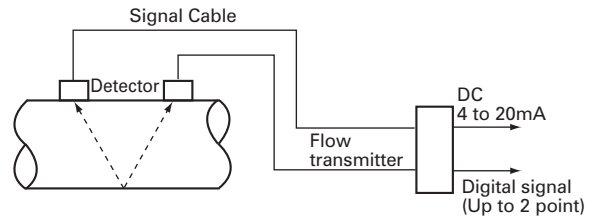

### (2) Single path system (Z method)

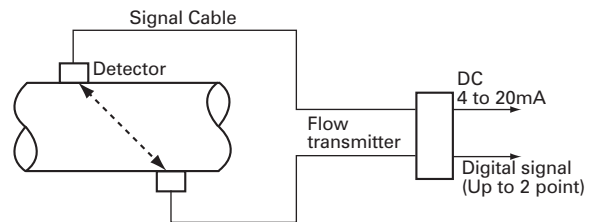

## MOUNTING OF DETECTOR

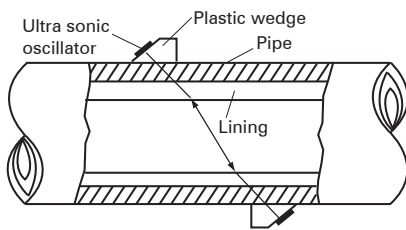

### Conditions on straight pipe

(D : Inside diameter of pipe)

| Classification | Upstream side | Downstream side |
|----------------|---------------|-----------------|
| 90 bend        |               |                 |
| Tee            |               |                 |
| Diffuser       |               |                 |
| Reducer        |               |                 |
| Various Valve  |               |                 |
| Pump           |               |                 |

(Note) The source : JEMIS-032

## CODE SYMBOL

### <Flow transmitter>


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | Description                                                   |
|---|---|---|---|---|---|---|---|---|----|----|----|---------------------------------------------------------------|
| F | L | R |   |   |   |   | Y | 4 | 1  |    |    | <Default language setting/<br>instruction manual> (4th digit) |
|   |   |   |   |   |   |   | S |   |    |    |    | S: Japanese/Japanese                                          |
|   |   |   |   |   |   |   | E |   |    |    |    | E: English/English                                            |
|   |   |   |   |   |   |   | C |   |    |    |    | C: English/Chinese                                            |
|   |   |   |   |   |   |   |   |   |    |    |    | <Power Supply> (5th digit)                                    |
|   |   |   |   |   |   |   |   |   | 1  |    |    | 100 to 240Vac, 50/60Hz                                        |
|   |   |   |   |   |   |   |   |   | 4  |    |    | 20 to 30Vdc                                                   |
|   |   |   |   |   |   |   |   |   |    |    |    | <Communication and<br>Synchronization> (6th digit)            |
|   |   |   |   |   |   |   | Y |   |    |    |    | None                                                          |
|   |   |   |   |   |   |   | D |   |    |    |    | RS-485                                                        |
|   |   |   |   |   |   |   |   |   | 4  |    |    | <Revision No.> (8th digit)                                    |
|   |   |   |   |   |   |   |   |   |    |    |    | <Case structure> (9th digit)                                  |
|   |   |   |   |   |   |   |   |   | 1  |    |    | Jetproof type (IP65)                                          |
|   |   |   |   |   |   |   |   |   |    |    |    | <Mounting bracket> (10th digit)                               |
|   |   |   |   |   |   |   |   |   |    | A  |    | For 2B pipe mount                                             |
|   |   |   |   |   |   |   |   |   |    | B  |    | For wall mount                                                |
|   |   |   |   |   |   |   |   |   |    |    |    | <Parameter setting, tag plate> (11th digit)                   |
|   |   |   |   |   |   |   | Y |   |    |    |    | Without                                                       |
|   |   |   |   |   |   |   | A |   |    |    |    | With setting                                                  |
|   |   |   |   |   |   |   | B |   |    |    |    | With setting (Tag plate)                                      |
|   |   |   |   |   |   |   | C |   |    |    |    | With Tag plate                                                |
|   |   |   |   |   |   |   |   |   |    |    |    | <Measurement accuracy> (12th digit)                           |
|   |   |   |   |   |   |   | Y |   |    |    |    | Standard                                                      |
|   |   |   |   |   |   |   | C |   |    |    |    | High accuracy type (Pipe diameter ø50mm or more)              |

### <Detector>

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Description                             |
|---|---|---|---|---|---|---|---|---|----|-----------------------------------------|
| F | S | S | A | 1 | A | 1 | Y |   |    | <Sensor type> (4th digits)              |
|   |   |   |   |   |   |   |   |   |    | ø25 to ø225mm (V method) -20 to 100°C   |
|   |   |   |   |   |   |   |   |   |    | <Guide rail> (5th digits)               |
|   |   |   |   |   |   |   |   |   |    | Provided                                |
|   |   |   |   |   |   |   |   |   |    | <Mounting belt> (6th digits)            |
|   |   |   |   |   |   |   |   |   |    | Stainless belt (1.0m X2)                |
|   |   |   |   |   |   |   |   |   |    | <Acoustic coupler> (7th digit) (Note 1) |
|   |   |   |   |   |   |   | Y |   |    | None                                    |
|   |   |   |   |   |   |   | A |   |    | Silicon rubber                          |
|   |   |   |   |   |   |   | B |   |    | Silicon-free grease                     |
|   |   |   |   |   |   |   |   |   |    | <Water-proof treatment> (9th digit)     |
|   |   |   |   |   |   |   | Y |   |    | None                                    |
|   |   |   |   |   |   |   |   |   |    | <Tag plate> (10th digit)                |
|   |   |   |   |   |   |   | Y |   |    | None                                    |
|   |   |   |   |   |   |   | A |   |    | Provided                                |

Note 1: Normally select silicone rubber as acoustic coupler. Silicone rubber in tube (100g) is furnished. If you place an order for several units, 1 tube may suffice for every 5 units. Select silicone-free grease for semiconductor manufacturing equipment or the like that is vulnerable to silicone. The silicone-free grease is water-soluble and, therefore, cannot be used in environment exposed to water or on piping subjected to a condensation. Since the grease does not set, a periodic maintenance (cleaning, refilling every about 6 months at normal temperature) is necessary.

### Belt appearance for attachment of the detector.

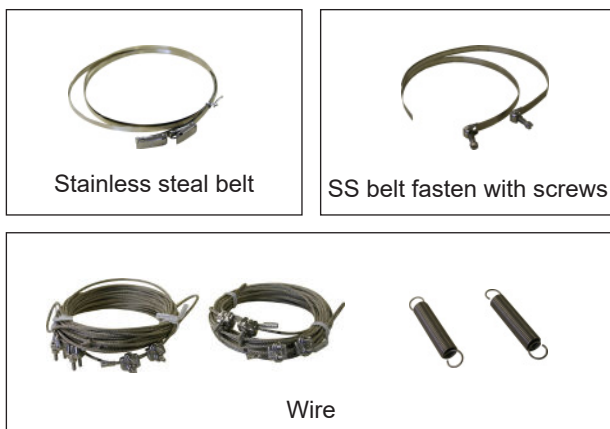

### <Detector • Rail extension type>

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Description                                    |
|---|---|---|---|---|---|---|---|---|----|------------------------------------------------|
| F | S | S | C | 1 |   |   |   | 1 | Y  | <Sensor type> (4th digits)                     |
|   |   |   |   |   |   |   |   |   |    | ø50 to ø1200mm -40 to 120°C                    |
|   |   |   |   |   |   |   |   |   |    | <Guide rail> (5th digits)                      |
|   |   |   |   |   |   |   |   |   |    | Standard (Rail extension type)                 |
|   |   |   |   |   |   |   |   |   |    | <Mounting belt> (6th digits) *2                |
|   |   |   |   |   |   |   |   |   |    | None                                           |
|   |   |   |   |   |   |   |   |   |    | Stainless steel belt ≤ø300mm (1.5m x 2pcs)     |
|   |   |   |   |   |   |   |   |   |    | SS belt fasten with screws ≤ø600mm (1m x 4pcs) |
|   |   |   |   |   |   |   |   |   |    | Wire ≤ø1500mm (5m x 2pcs)                      |
|   |   |   |   |   |   |   |   |   |    | <Acoustic coupler> (7th digit) (Note 1)        |
|   |   |   |   |   |   |   |   |   |    | None                                           |
|   |   |   |   |   |   |   |   |   |    | Silicon rubber                                 |
|   |   |   |   |   |   |   |   |   |    | Silicon-free grease                            |
|   |   |   |   |   |   |   |   |   |    | <Water-proof treatment> (9th digit)            |
|   |   |   |   |   |   |   |   |   |    | None                                           |
|   |   |   |   |   |   |   |   |   |    | <Tag plate> (10th digit)                       |
|   |   |   |   |   |   |   |   |   |    | None                                           |
|   |   |   |   |   |   |   |   |   |    | Provided                                       |

Note2) Please refer to the table 1 for mounting belt to be selected at 6th digits.

[Table1] How to select at 6th digits.

| Mounting method | ≤ø300mm | ≤ø600mm | ≤ø1200mm |
|-----------------|---------|---------|----------|
| V method        | A or C  | C       | D        |
| Z method        | C       | D       | D        |

### Explanation of the extendable rail type detector

#### ■Unextended condition



available pipe diameter up to ø50 to ø300mm

<V method>

#### ■Extended condition



available pipe diameter up to ø600mm

<V method>

#### ■Installation of the supplied rail end.




available pipe diameter up to ø1200mm

<Z method>

### <Signal cable>


| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8     | Description                                       |
|---|---|---|---|---|---|---|-------|---------------------------------------------------|
| F | L | Y | A |   |   |   | 1     | Type of sensor (4th digit code)<br>for FSSA, FSSC |
|   |   |   |   |   |   |   |       | Cable length (5, 6 and 7th digit)                 |
|   |   |   |   |   |   |   | 0 0 5 | 5 m                                               |
|   |   |   |   |   |   |   | 0 1 0 | 10 m                                              |
|   |   |   |   |   |   |   | 0 1 5 | 15 m                                              |
|   |   |   |   |   |   |   | 0 2 0 | 20 m                                              |
|   |   |   |   |   |   |   | 0 2 5 | 25 m                                              |
|   |   |   |   |   |   |   | 0 3 0 | 30 m                                              |
|   |   |   |   |   |   |   | 0 4 0 | 40 m                                              |
|   |   |   |   |   |   |   | 0 5 0 | 50 m                                              |
|   |   |   |   |   |   |   | 0 6 0 | 60 m                                              |
|   |   |   |   |   |   |   | Z Z Z | Others (contact us)                               |

# OUTLINE DIAGRAM (Unit:mm)

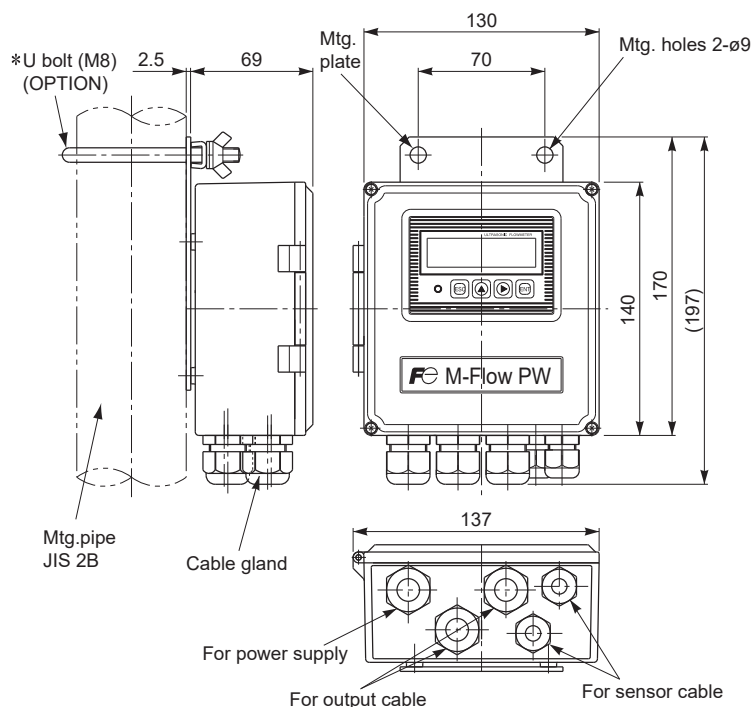


| Position     | Cable diameter range |
|--------------|----------------------|
| Power supply | ø7 ~ ø11             |
| Output cable | ø6 ~ ø12             |
| Sensor cable | ø4 ~ ø8              |


Flow transmitter : Type FLR

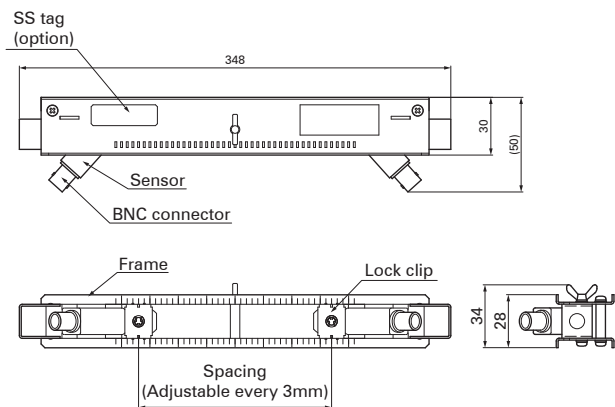


Detector : Type FSSA

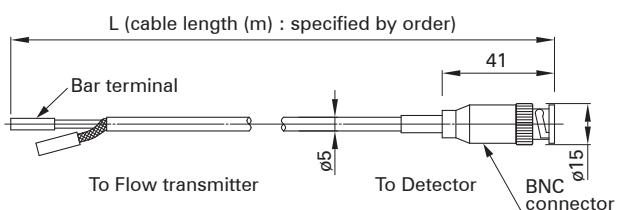


Signal cable : Type FLYA

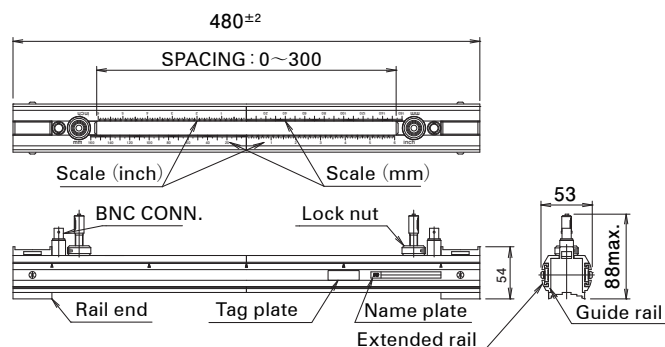

<Shipment style (V Method)>

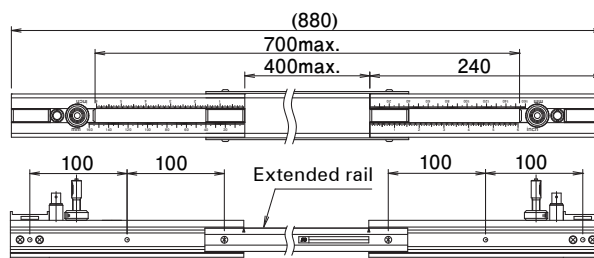

<Extended style (Longest, V Method)>



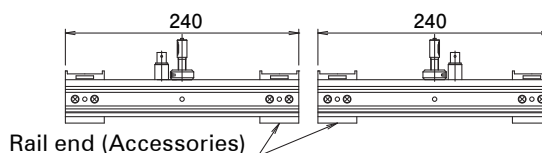


<Sepalate style (Z Method)>


Detector : Type FSSC

## CONNECTION DIAGRAM


### <Flow transmitter>

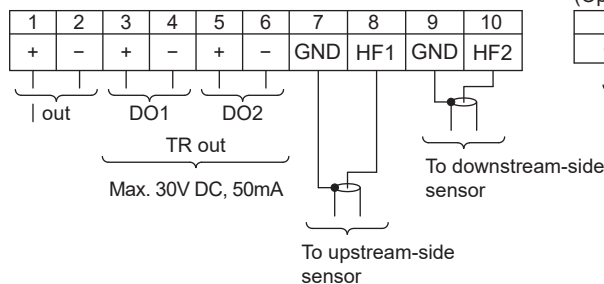

RS-485 communication  
(Optional)



### <Detector>




### Usable wiring material

#### • Wire

Gauge: AWG20 (0.5mm<sup>2</sup>) to AWG16 (1.5mm<sup>2</sup>)

Strip-off length: 8~10mm




Note 1: Please use AWG20 to AWG18 power cables.

Note 2: When using in North America, please use copper wire for the power cable.

#### • Bar terminal

Weidmüller

www.weidmuller.com



## SCOPE OF DELIVERY

- Flow transmitter (provided with U-bolt and nuts for pipe mount)
- Detector (provided with mounting fixture and acoustic coupler)
- Signal cable
- Instruction manual (product)
- Please download the instruction manual (communication), loader software from the measuring instrument website listed at the end of this data sheet.

## ITEMS DESIGNATED ORDERING

1. Detector code symbols
2. Flow transmitter code symbols
3. Signal cable code symbols
4. Tag No.as necessary(up to 8 alphanumerical characters)
5. If parameter setting is specified, send back the attached parameter specification table duly filled.

## OPTIONAL ACCESSORIES

|   | Name                                   | Drawing No.    |
|---|----------------------------------------|----------------|
| 1 | Silicone rubber (KE348W)               | ZZP*45735N2    |
| 2 | Silicone-free grease (HIGH-Z)          | ZZP*TK7M0981P1 |
| 3 | Stainless steel belt (1.5m x 2pcs)     | ZZP*TK7L6658P4 |
| 4 | SS belt fasten with screws (1m x 4pcs) | ZZP*TK7M7073P1 |
| 5 | Wire set (5m x 2pcs)                   | ZZP*TK7N5813C4 |

## Checked items before purchase

Following conditions may cause failure of the measurement or to reduce the accuracy by this flow meter.

Please consult and ask Fuji Electric for checking with actual equipment previously if you have hard to judge the appropriate application.

#### 1)Fluid

- If fluid contains a large amount of bubbles (approx. 12vol% or more at 1m/s flow rate)
- If fluid has bad turbidity 10000(mg/L) or more,
- If fluid contains slurry or solid materials (about 5wt%)
- If flow rate is low Reynolds No.10000 or less, (reference: flow rate 5m<sup>3</sup>/h with ø100mm)
- If it is circulating oil, liquid medicine of low concentration, waste liquid and hot spring,

#### 2)Pipe

- If inside pipe is rusty carbon steel pipe,
- If inside pipe having adhering substances and sediment
- If outer surface of cast-iron pipe is rough,
- If pipe wall is thick such as ruinous pipe,(PP material 15mm or more, PVDF material 9mm or more)
- If it is SGPW pipe,
- If lining pipe is removed from pipe,(Teflon,PVC,Glass)
- If it is rubber pipe,

#### 3) Length of the straight pipe

For accurate measurement, straight pipes are needed between up and down stream side of the measuring part. Please meet the straight pipe conditions according item4.

## Caution on use

- 1) Do not damage the sensor or signal mounted on the pipe.
- 2)Make sure to fill the fluid inside the pipe to measure .
- 3)When you use horizontal pipe, it is recommended to install the sensor horizontally.
- 4)When you use the grease as acoustic coupler to install the sensor for outdoor use, it is recommended to install the waterproof cover to prevent from the degradation.

<Parameter specification table>

| Setting item         |                  | Initial value                   | Setting value       | Setting item      |                    | Initial value            | Setting value    |
|----------------------|------------------|---------------------------------|---------------------|-------------------|--------------------|--------------------------|------------------|
| ID No                |                  | 0000                            |                     | Output conditions | Total output       | Total mode               | Stop             |
| Language             |                  | English                         |                     |                   |                    | Total rate               | 0m³              |
| Measuring conditions | System unit      | Metric                          |                     |                   |                    | Total preset             | 0m³              |
|                      | Flow unit        | m³/h                            |                     |                   |                    | Pulse width              | 50.0msec         |
|                      | Total unit       | m³                              |                     |                   |                    | Burnout (total)          | Hold             |
|                      | Outer diameter   | 60.00mm                         |                     |                   |                    | Burnout timer            | 10sec            |
|                      | Pipe material    | PVC pipe                        |                     |                   | Output conditions  | DO1 output type (Note 1) | Not used         |
|                      | Wall thickness   | 4.00mm                          |                     |                   |                    | DO1 output actuation     | ON when actuated |
|                      | Lining material  | Without lining                  |                     |                   |                    | DO2 output type          | Not used         |
|                      | Lining thickness | —                               |                     |                   |                    | DO2 output actuation     | ON when actuated |
|                      | Kind of fluid    | Water                           |                     |                   |                    | Operation mode           | Standard         |
|                      | Viscosity        | 1.0038×10 <sup>-6</sup> m²/s    |                     |                   |                    |                          |                  |
|                      | Sensor mount     | V metod                         |                     |                   |                    |                          |                  |
|                      | Sensor type      | FSSA                            |                     |                   |                    |                          |                  |
| Output conditions    | Damping          | 5.0sec                          |                     | Communication     | Communication mode | RS-485                   |                  |
|                      | Cut off          | 0.150m³/h                       |                     |                   | Baud rate          | 9600bps                  |                  |
|                      | Display          | 1st line                        | Flow velocity (m/s) |                   | Parity             | Odd                      |                  |
|                      |                  | 1st line decimal point position | ****.***            |                   | Stop bit           | 1 bit                    |                  |
|                      | Display          | 2nd line                        | Flow rate (m³/h)    |                   | Station No.        | 1                        |                  |
|                      |                  | 2nd line decimal point position | ****.***            |                   |                    |                          |                  |
|                      | Analog output    | Range type                      | Flow rate           |                   |                    |                          |                  |
|                      |                  | Range type                      | Single range        |                   |                    |                          |                  |
|                      |                  | Full scale 1                    | 15.000m³/h          |                   |                    |                          |                  |
|                      |                  | Full scale 2                    | 0.000m³/h           |                   |                    |                          |                  |
|                      |                  | Range HYS.                      | 10.00%              |                   |                    |                          |                  |
|                      |                  | Burnout (current)               | Hold                |                   |                    |                          |                  |
|                      |                  | Burnout timer                   | 10sec               |                   |                    |                          |                  |
|                      |                  | Output low limit                | -20%                |                   |                    |                          |                  |
|                      |                  | Output high limit               | 120%                |                   |                    |                          |                  |
|                      |                  | Rate limit                      | 0.000m³/h           |                   |                    |                          |                  |
|                      |                  | Rate limit timer                | 0sec                |                   |                    |                          |                  |

Note1: When total pulse output has been selected for DO1, DO2 specify total pulse value and total pulse width so that conditions 1 and 2 shown below are satisfies.

$$\text{Condition 1 : } \frac{\text{Flow span-1} \times [\text{m}^3/\text{s}]}{\text{total pulse value} \times [\text{m}^3]} \leq 100[\text{Hz}]$$

$$\text{Condition 2 : } \frac{\text{Flow span-1} \times [\text{m}^3/\text{s}]}{\text{total pulse value} \times [\text{m}^3]} \leq \frac{1000}{2 \times \text{total pulse width} [\text{ms}]}$$

\* In the case of 2 ranges, perform calculations using either flow span-1 or flow span-2, whichever is greater.

Information in this catalog is subject to change without notice.  
Read the instruction manuals thoroughly before using the products.

**F** Fuji Electric Co., Ltd.

Gate City Ohsaki, East Tower, 11-2, Osaki 1-chome, Shinagawa-ku, Tokyo 141-0032, Japan  
Phone: +81-3-5435-7111  
www.fujielectric.com  
www.fujielectric.com/products/sensors\_measurements/instruments/index.html

